

SPECIFICATION

Description	100-240V LED Driver, Constant Voltage Driver
Electrical Characteristics	Ta = 25°C, 100-240Vrms input, standard reference load; unless otherwise specified
Class I, IP67, thermally protected	110°C, built-in driver

Product Name	215-319
--------------	---------

Input Parameters

Rated Input Voltage	Uin	100-240VAC
Input Current (Full load)	Iin	3.5A
Input Frequency	fin	50/60Hz
Maximum Input Power	Pin	350W
Power Factor (Full load)	λ	≥0.95
THD(Full load)		≤15%
Efficiency (Full load)	η	≥93%
No-load power		≤0.64W
Inrush current (Cold start)		≤70A@500uS
Input Voltage Derating Range		80% Load @90V-198V; 100% Load @198V-264V
Turn on time		≤500ms

Output Parameters

Output Voltage	Vout	24V±5%
Output Current (Full load)	Iout	13.34A
Output Power (Full load)	Pout	320W
Operating Frequency(Full load)	Fout	60-180KHz
Ripple & Noise		≤800mV
Load Regulation		≤5%
Line Regulation		≤5%

Ambient

Storage Temperature	ts	-40 ...+ 70
Operating Ambient Temperature	ta	-40 ...+ 50
Case Temperature at tc Point	tc	90

Protection

No Load		Auto-recovery if fault is removed
Over Load		Auto-recovery if fault is removed
Short Circuit		Auto-recovery if fault is removed

System Parameters

Hi-pot		3.75KVAC,leakage<5mA,60s
Average Service Life		50,000Hours



Compliances and approvals

Safety		EN 61347-2-13
RFI		EN 55015
Harmonics		EN 61000-3-2 Class C
Immunity		EN 61547

Note

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25 of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor.
3. Expected Life:tc=80°C,0.2%/1000h failure rate

Physical Parameter

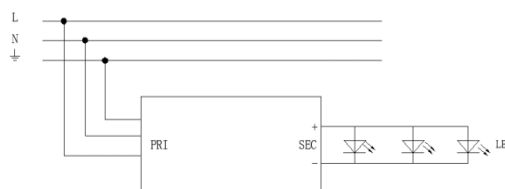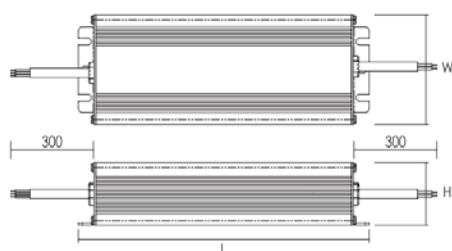

Dimensions(LxWxH):300x57x32mm

Housing Material:aluminium

Input Wire:VDE H05RN-F, 3x1.0mm²;Output Wire:VDE H07RN-F,2*2.5mm²