

TRONIX

Product data sheet: 215-321





Features

- Super compact design
- Dimmable constant current driver
- Analogue flicker-free
- Dimming with leading edge or trailing edge dimmer
- Smooth dimming compatible with most dimmer
- Dimming range 1...100%
- Primary and secondary sides come with leads
- Protections: opencircuit, shortcircuit, overload, overtemperature
- SELV equivalent
- Driver for built-in use
- Suitable for protection class II luminaires
- Protection class II
- Nominal life-time up to 50,000 h
- 5-year guarantee

Applications

- Office
- Shop
- Hospitality
- Public areas

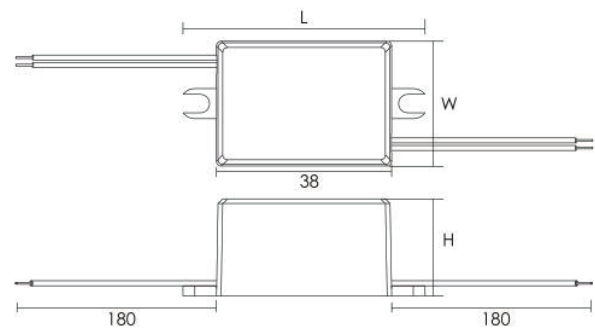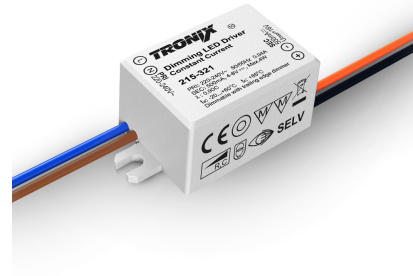

Approbations & Certifications

CE, CB, TUV

Housing properties

- Housing material: plastic, white.
- Type of protection IP₂₀

Electrical Specifications

Type		Unit	215-321
INPUT	Nominal voltage	V	220 – 240
	Nominal frequency	Hz	50 / 60
	AC voltage range	V	198 – 264
	DC voltage range	V	N/A
	Nominal current	A	0.03
	THD (Full load)	%	≤ 25
	Power factor (Full load)		0.90C
	Efficiency (Full load)	%	70
	Turn on time	ms	≤ 500
	NO load	W	≤ 1.0
	Protection class		II
	Inrush current(Cold start)	A pk	5 (th = 100 μs)
	Max.units per circuit breaker		B10: 140 B16: 224 C10: 280 C16: 448
OUTPUT	Nominal voltage range	V	4 - 8
	Maximum voltage(Open Circuit)	Vdc	≤ 16
	Nominal current	mA	500
	Current accuracy	%	+/- 5
	Current ripple ≤120Hz	%	≤ 15
	Pst LM		≤ 1
	SVM		≤ 0.4
	Nominal power range	W	2 – 4
	Maximum power	W	4
	Galvanic isolation		SELV
ENVIRONMENT	Ambient temperature range ta	°C	-20 ...+60
	Maximum case temperature tc	°C	85
	Max. Case temp. In fault condition	°C	110
	Storage temperature range	°C	-20 ...+70
	Relative humidity	%	5 ... 85 (Not condensing)
	Surge transient protection	kV	0.5 1 (L/N LN/PE acc to. EN 61547 Clause 5.7)
	Environmental rating		Indoor
	IP rating		IP20
	Mains switching cycles		> 100,000
	Expected lifetime	h	50,000 (0.2% / 1'000 h failure rate)

*All parameters NOT specially mentioned are measured at 230VAC input ,rated current and 25°C of ambient temperature

Protections

Over temperature

Yes

Over load

Yes

No load

Yes

Short-circuit

Yes



Input overvoltage

Maximum allowed input voltage 264V AC


Output overvoltage

Yes, Limitation of Output voltage ≤ 50V


OUTPUT LOAD vs TEMPERATURE

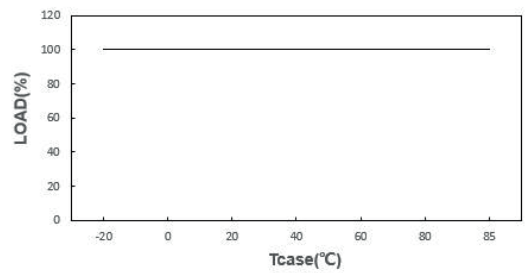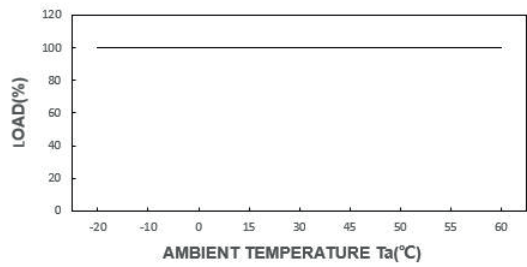


STATIC CHARACTERISTIC

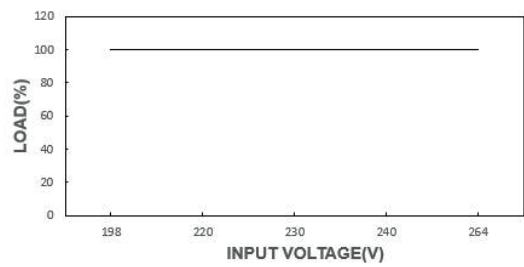


POWER FACTOR (PF) CHARACTERISTIC

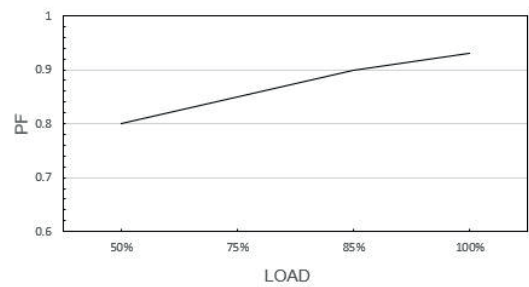


TOTAL HARMONIC DISTORTION (THD)

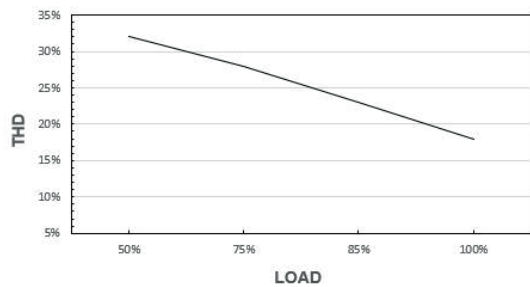

EFFICIENCY vs LOAD

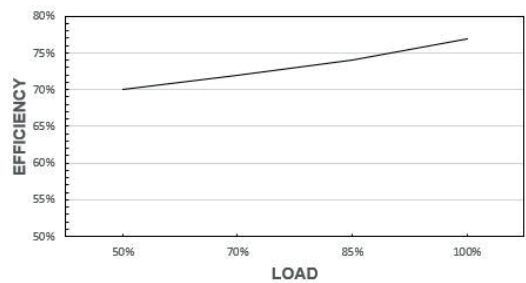


LIFE TIME

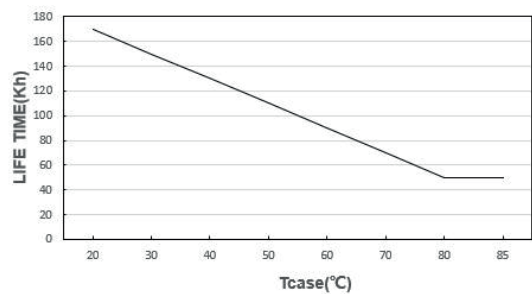

*The graph is for reference only, and the detailed values refer to the parameter table

Wiring Diagram

Max. cable length - system: 2 m
Dimensions(LxWxH): 38 x 27 x 21 mm
Weight: 40 g

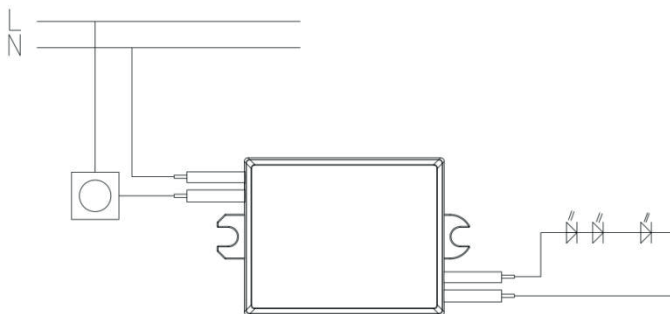

Input Wire: VDE 7726 0.5mm² Output Wire: UL 1015 22AWG

Hot plug-in or secondary switching of LEDs is not permitted and may cause a very high current to the LEDs.

Remarks

-**Touch current:** lower than 0.7 mA, according to EN 60598-1 annex. G and EN 61347-1 annex A

Standards

EN 61347-1
EN 61347-2-13
EN 62384
EN 55015
EN 61000-3-2
EN 61000-3-3
EN 61547
EN 60598-1
IEE1789
(EU) 2019/2020