



PHOTOMETRIC LIGHT REPORT

Tri-proof lightbar | 1560mm | IP65 | 40W | 3- CCT | DALI + emergency

Article number: 950-199



Go to the
webshop
of Tronix
Lighting



TRONIX



950-199 Tri-proof lightbar | 1560mm | IP65 | 40W | 3-CCT | DALI + emergency

Introduction

Purpose of this Document

This document provides accurate and objective photometric data for Tronix Lighting item 950-199. All information is based on actual measurements taken from standard production units. No modifications were made to enhance performance results. In some cases, minor adjustments—such as temporary removal of covers, cables, or mounting features—were necessary for testing purposes. These did not influence product performance.

Test Methodology

Testing was conducted using randomly selected, unopened samples from regular inventory. All tests comply with the LM-79-19 standard, the recognized method for photometric and electrical measurements of LED and OLED luminaires. This standard, an update of IES LM-79-2008, outlines environmental test conditions, stabilization procedures, measurement methods, and approved instruments. It uses absolute photometry, meaning results directly reflect the performance of the tested product, without comparison to rated lamp standards.

Product 950-199 was tested using:

- A photogoniometer to measure luminous intensity distribution at various angles
- An integrating sphere to determine total luminous flux and colour characteristics

Compliance & Certification

Item 950-199 meets the requirements of the following EU directives. Tronix Lighting certifies that all relevant tests were executed in accordance with the applicable standards, and the CE mark is applied accordingly:

- General Product Safety – Directive 2023/988/EC
- Low Voltage Directive (LVD) – Directive 2014/35/EU
- Electromagnetic Compatibility (EMC) – Directive 2004/108/EC
- Ecodesign – Directive 2009/125/EC
- RoHS 3 – Directive 2011/65/EU + Amendment 2015/863/EU

Recycling & Sustainability

Tronix Lighting is affiliated with national recycling systems for electrical and electronic waste. The luminaire is over 90% recyclable when disposed of as electronic waste at end of life. In addition, Tronix Lighting participates in national packaging recycling schemes, ensuring full compliance with both the WEEE and packaging directives.

950-199 Tri-proof lightbar | 1560mm | IP65 | 40W | 3-CCT | DALI + emergency

Laboratory and equipment

Laboratory owner and location	Tronix Lighting BV. Uden. The Netherlands
Gonio spectrometer system and type	Viso Systems Type C. horizontal
Spectrometer manufacturer and model	(Gonio) Ocean Optics STS VIS (Sphere) Admesy HERA VIS 380–780nm
Flicker meter manufacturer and model	Viso Systems LabFlicker
Oscilloscope manufacturer and model	Tektronix MDO3024 oscilloscope (4 Channels. 200 MHz)
Power meter manufacturer and model	Vitretek PA900 Precision Multi-Channel Harmonic Power Analyzer
Power source manufacturer and model	(DC) Keithley Source Measure Unit SMU-2420 3A DC Source Meter (AC) Chroma 61601 AC Source
Datalogger Manufacturer and Model	Omega 8-Channel Thermocouple Thermometer/Data Logger

Measurement conditions gonio spectrometer

Number of C-planes and Resolution	2 planes – 180°
γ (gamma)-Resolution	1°
Test Distance	1.81 m
Room Temperature and Humidity	22°C +/- 10% – RH 50% +/- 20%
Input Power. Power and Displacement Factors	56.4 W – PF 0.96 – DPF 0.96
Frequency of Input Power	50 Hz
Warm-up Time and Variation	Lamp stabilized in 15 min 8 sec – +2.9%

Tested light source

Manufacturer and Order Code	Tronix Lighting – 950-199
Product Description	Tri-proof lightbar 1560mm IP65 40W 3-CCT DALI + emergency

Main Light Measurement Results

Output – Total Lumen (Up% / Down%)	8371 lm – 0% / 100%
Efficiency	148 lm/W
Energy efficiency class	D
Peak Intensity and Beam Angle	2092 cd – 143.2°
Correlated Colour Temperature	CCT = 4171 K
Colour Shift. CIE duv	Duv -0.0058
Colour Rendering Index	CRI 87.3
Colour Rendering TM30-18	R _f 84.9 – R _g 96.5
Television Lighting Consistency Index	TLCI = 75
Flicker	SVM 0.01 – PstLM 0.06

950-199 Tri-proof lightbar | 1560mm | IP65 | 40W | 3-CCT | DALI + emergency

Electrical measurement details

Input Power

RMS Input voltage feed. V_{RMS}

230 V

RMS Input current feed. I_{RMS}

0.257 A

Total input power

56.4 W

Frequency of input power

50 Hz

Power factor

0.96

Displacement power factor

0.96

Total harmonic distortion of the current


12.39%

Total harmonic distortion of the voltage

2.29%

Input Power Curve

Voltage - Current

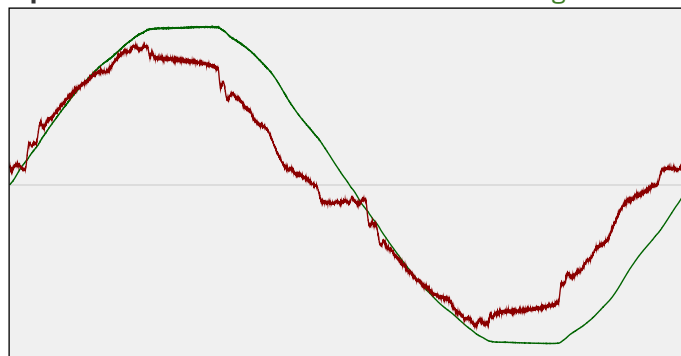

Efficiency

Radiated power efficiency: 47.3%



Lumen efficiency: 148 lm/W



Harmonics

3rd Harmonic

9.57%

5th Harmonic

5.79%

7th Harmonic

1.71%


9th Harmonic

3.11%

11th Harmonic

1.38%

Current Harmonics %

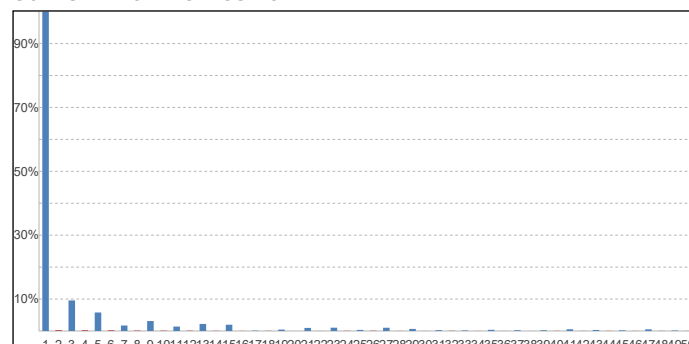

Stabilization Details

Warm-up Conditions

Stable period

15 min CCT start

4168 K

Stable change max

2.0% CCT shift

+3 K

Minimum warm-up time

15 min CCT end

4171 K

Colour temperature change during warm-up

Warm-up Results

Total warmup time

Lamp stabilized in 15 min 8 sec

Output intensity change during warm-up

Output start

8304 lm

Warmup variation

+2.9%

Output change

+67 lm

Output end

8371 lm


950-199 Tri-proof lightbar | 1560mm | IP65 | 40W | 3-CCT | DALI + emergency

Colour measurement details


Total lumen output 8371 lm
 Correlated Colour Temperature 4171 K
 Colour coordinates CIE 1931 (x;y) = (0.370;0.358)
 Colour deviation from BBL Duv = -0.0058

TM30-18 Colour Fidelity Index R_f 84.9
 TM30-18 Colour Gamut Index R_g 96.5
 Colour Rendering Index (Ra) CRI 87.3
 Colour Rendering Index. (red component) R9 = 28.7


Colour Quality Scale CQS = 83.8
 Television Lighting Consistency Index TLCI = 75

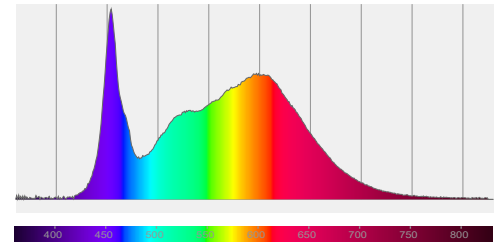

Relative spectral power distribution

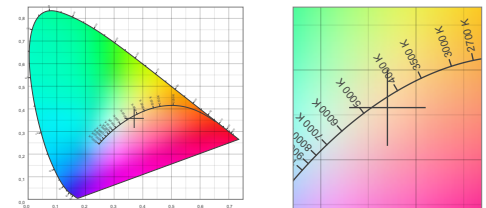

TM30 details

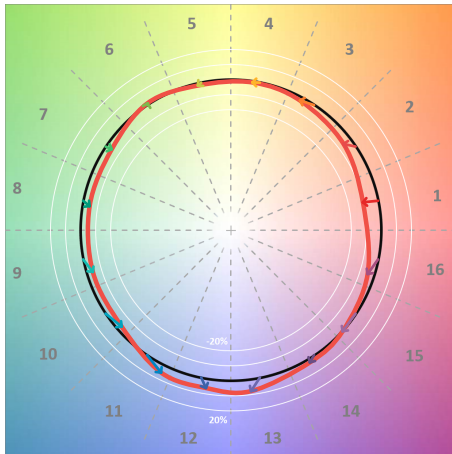


TM30 Colour vectors per hue bin




TM30 Colour distortion


Hue Bin	R_f	Shifts (%)	
		Chroma	Hue
C1	82	-10%	1%
C2	85	-6%	6%
C3	81	-3%	10%
C4	88	-1%	5%
C5	90	-1%	3%
C6	94	1%	-1%
C7	92	-4%	-1%
C8	90	-5%	3%
C9	85	-5%	9%
C10	78	-4%	13%
C11	78	4%	14%
C12	86	6%	4%
C13	86	8%	-8%
C14	90	3%	-5%
C15	80	-1%	-15%
C16	80	-5%	-11%

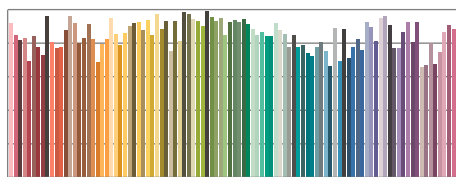

TM30-18 R_f -values per reference colour

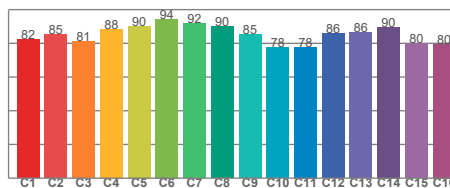


TM30-18 R_f -values per hue bin

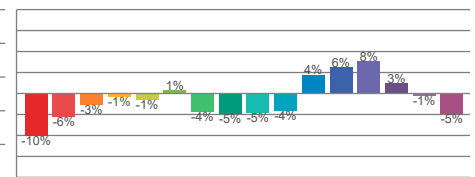


TM30 Chroma shift

Colour Quality details

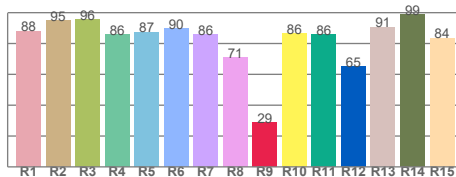

Colour Rendering Index

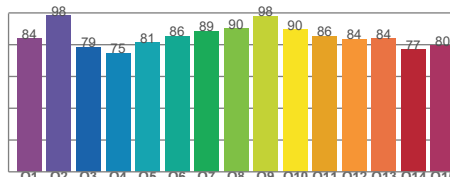

Colour Quality Scale

950-199 Tri-proof lightbar | 1560mm | IP65 | 40W | 3-CCT | DALI + emergency

Flicker / temporal light artefacts details

Measurement conditions

Flicker meter type	Viso Systems LabFlicker
Flicker/TLA sample rate	20000 samples/s
Measurement time	5x 180 seconds (15 minutes) for PstLM. 1.2 sec for all other indices

Flicker indices according to Illuminating Engineering Society (IES)


Flicker frequency	93.02 Hz
Percent flicker	0.28 %
Flicker index	0

TLA indices (according IEC TR 61547-1, EN 61000-3-3 and EN 61000-4-15)


An LED luminaire is considered flicker-free if the SVM value is ≤ 0.4 and if the PstLM value is ≤ 1.0

PstLM value ($F < 80$ Hz)	0.06
SVM value ($80 < F < 2000$ Hz)	0.01


Flicker frame (one flicker period in time domain)

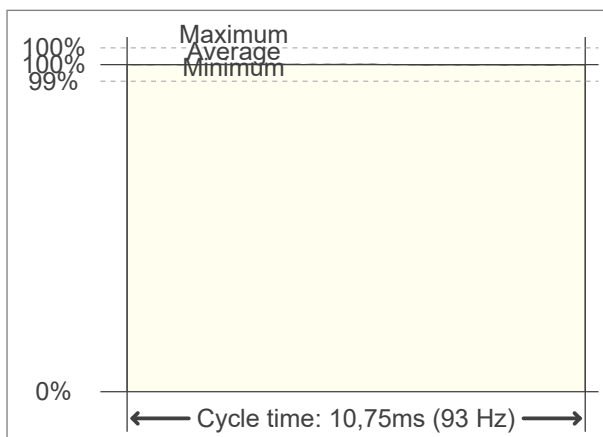

Flicker FFT (flicker curve in frequency domain)

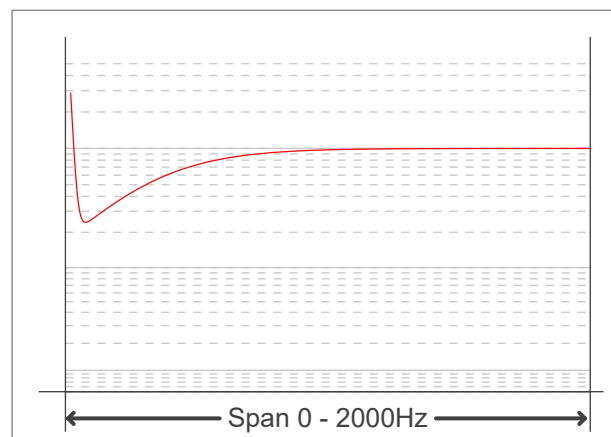


IEEE 1789-2015 Lighting Flicker Risk Zones

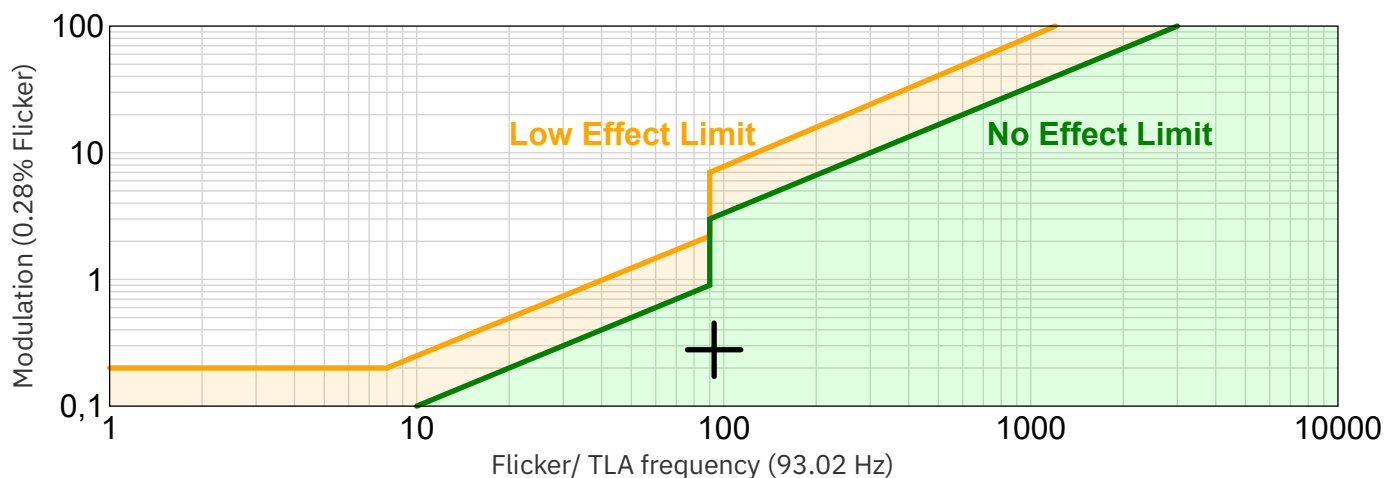

950-199 Tri-proof lightbar | 1560mm | IP65 | 40W | 3-CCT | DALI + emergency

Beam angle

Luminous Intensity diagram

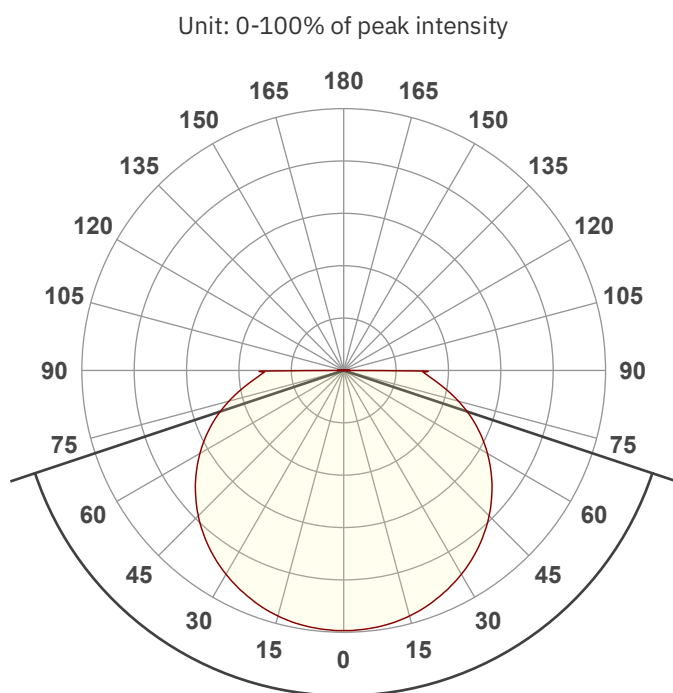

143,2°

Main Values

Output (total Lumen)	8371 lm
Lumen Up/Down	0% / 100%
Peak Intensity	2092 cd
Beam Angle (50%)	143.2°
Beam Angle (90%)	143.2°
Beam Angle (10%)	143.2°

Cut-off Angle

Average 2.5%	180.1°
--------------	--------

Field Angle

Average 10%	179.8°
-------------	--------

Intensity Ratio


In 120° cone	64.4%
In 90° cone	41.2%

C planes

C000-C180


C090-C270

Linear distribution diagram - Intensity (candela) vs γ-angle

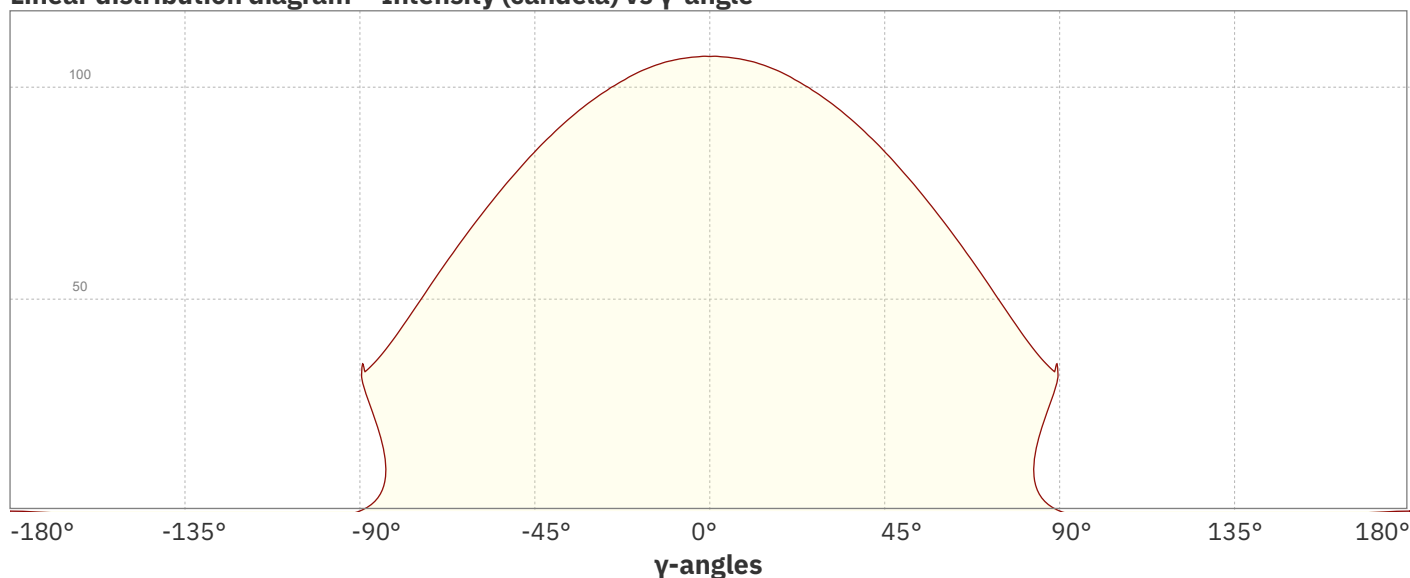

950-199 Tri-proof lightbar | 1560mm | IP65 | 40W | 3-CCT | DALI + emergency

Beam Details

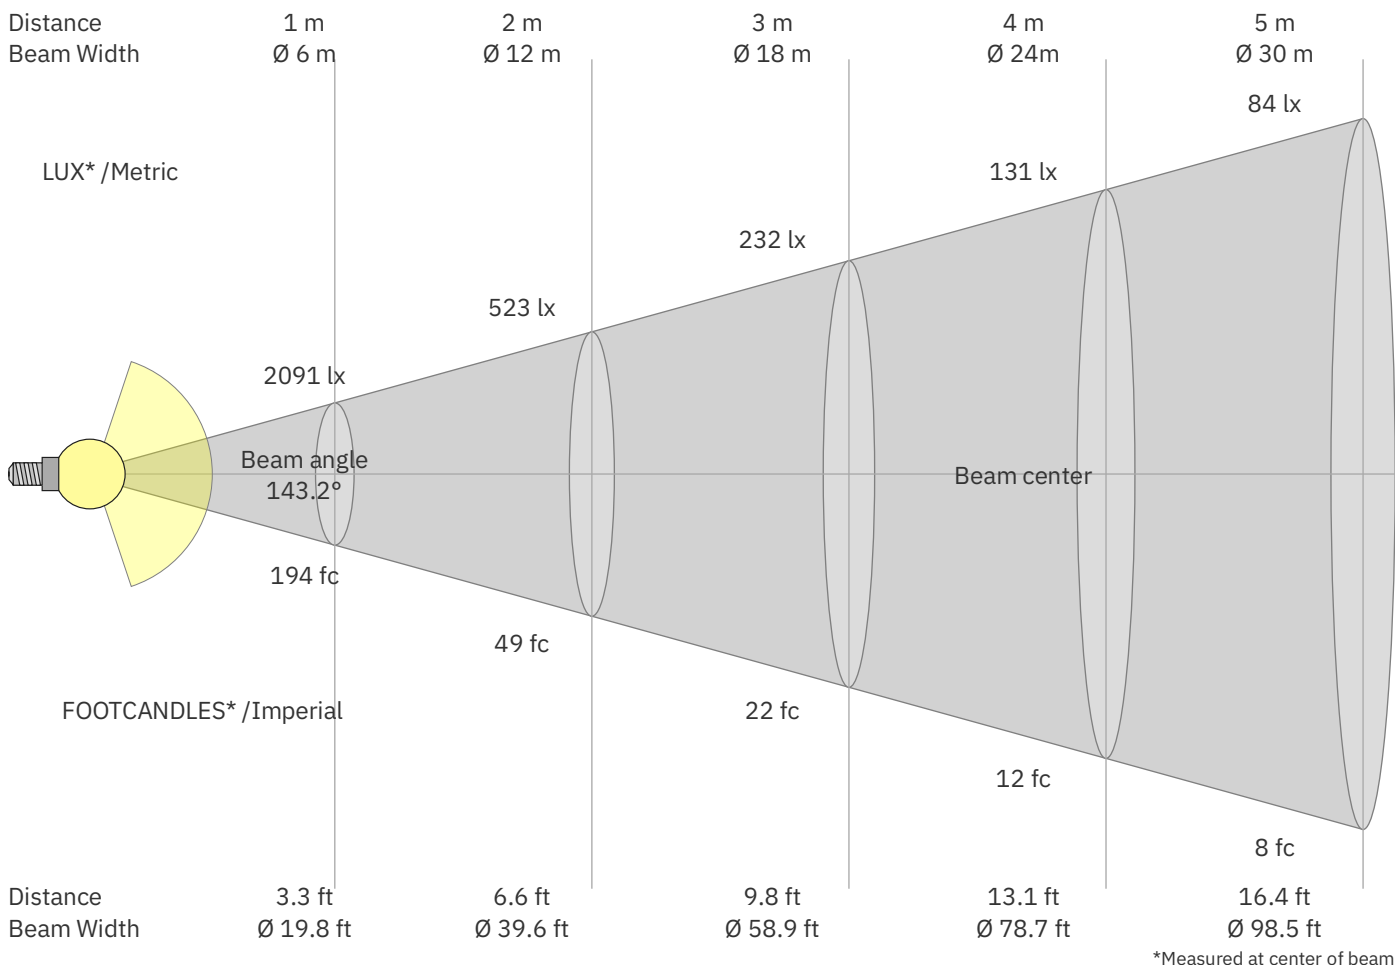

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6	ft
2091	523	232	131	84	58	43	33	26	21	17	15	12	11	9	8	7	6	6	5	lux
194.3	48.6	21.6	12.1	7.8	5.4	4	3	2.4	1.9	1.6	1.3	1.1	1	0.9	0.8	0.7	0.6	0.5	0.5	fc

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
2091	2087	2071	2044	2004	1952	1892	1822	1742	1653	1554	1448	1335	1214	1087	955	825	708	117	0	cd
100%	100%	99%	98%	96%	93%	90%	87%	83%	79%	74%	69%	64%	58%	52%	46%	39%	34%	6%	0%	of 0°val

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
2091	2087	2071	2044	2004	1952	1892	1822	1742	1653	1554	1448	1335	1214	1087	955	825	708	117	0	cd
100%	100%	99%	98%	96%	93%	90%	87%	83%	79%	74%	69%	64%	58%	52%	46%	39%	34%	6%	0%	of 0°val

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
2091	2087	2071	2044	2004	1952	1892	1822	1742	1653	1554	1448	1335	1214	1087	955	825	708	117	0	cd
100%	100%	99%	98%	96%	93%	90%	87%	83%	79%	74%	69%	64%	58%	52%	46%	39%	34%	6%	0%	of 0°val

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
2091	2087	2071	2044	2004	1952	1892	1822	1742	1653	1554	1448	1335	1214	1087	955	825	708	117	0	cd
100%	100%	99%	98%	96%	93%	90%	87%	83%	79%	74%	69%	64%	58%	52%	46%	39%	34%	6%	0%	of 0°val



950-199 Tri-proof lightbar | 1560mm | IP65 | 40W | 3-CCT | DALI + emergency

Light Planning – UGR table

Uncorrected, comprehensive UGR table according to CIE 117-1995

Reflectances		70	70	50	50	30	70	70	50	50	30
ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room size		Viewed Crosswise					Viewed Endwise				
H = mounting height above eye level		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
X	Y										
2H	2H	21.3	22.8	21.6	23.1	23.3	22.3	23.7	22.6	24.1	24.3
	3H	23.3	24.7	23.7	25.0	25.2	24.6	26.1	25.1	26.4	26.6
	4H	24.2	25.6	24.6	25.9	26.2	25.9	27.3	26.3	27.6	27.8
	6H	25.2	26.5	25.5	26.7	27.1	27.3	28.5	27.6	28.8	29.2
	8H	25.6	26.8	26.0	27.1	27.6	27.9	29.2	28.3	29.5	29.9
	12H	26.0	27.2	26.4	27.5	28.0	28.7	29.9	29.1	30.2	30.7
4H	2H	22.2	23.6	22.6	23.9	24.2	22.9	24.3	23.3	24.6	24.9
	3H	24.4	25.6	24.8	25.9	26.4	25.5	26.7	25.9	27.1	27.5
	4H	25.4	26.6	25.9	27.0	27.5	26.8	27.9	27.3	28.4	28.9
	6H	26.5	27.6	27.0	27.9	28.3	28.3	29.4	28.8	29.7	30.1
	8H	27.0	28.0	27.5	28.4	28.8	29.1	30.0	29.6	30.4	30.8
	12H	27.5	28.3	28.0	28.8	29.3	29.9	30.8	30.4	31.2	31.7
8H	4H	26.0	27.0	26.5	27.4	27.8	27.2	28.2	27.7	28.5	28.9
	6H	27.3	28.1	27.8	28.6	29.1	28.9	29.6	29.4	30.1	30.7
	8H	28.0	28.7	28.5	29.2	29.8	29.8	30.5	30.3	31.0	31.7
	12H	28.6	29.2	29.2	29.7	30.3	30.8	31.4	31.4	31.9	32.5
12H	4H	26.1	27.0	26.6	27.4	27.9	27.2	28.1	27.7	28.5	29.0
	6H	27.5	28.2	28.0	28.8	29.4	29.0	29.7	29.5	30.2	30.9
	8H	28.2	28.9	28.8	29.4	30.0	29.9	30.6	30.5	31.1	31.7
Variations with the observer position for the luminaire spacings. S:											
S = 1.0H				0.1 / 0.0				0.1 / -0.1			
S = 1.5H				0.1 / -0.1				0.1 / -0.1			
S = 2.0H				0.2 / -0.2				0.3 / -0.3			

Coefficients of Utilization

Ceiling reflectance	80			70			50			30			10			0		
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)																	
	Room Values are expressed as percentage of Lumen delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	105	98	92	87	102	96	91	86	91	87	83	87	84	80	84	81	78	75
2	94	83	75	68	91	81	74	67	78	71	65	74	69	64	71	66	62	60
3	85	72	62	55	82	70	61	54	67	59	53	64	58	52	62	56	51	49
4	77	63	53	45	74	62	52	45	59	51	44	57	49	44	54	48	43	41
5	70	56	46	38	68	55	45	38	52	44	38	50	43	37	48	42	37	34
6	65	50	40	33	63	49	40	33	47	39	33	45	38	32	44	37	32	30
7	60	45	36	29	58	44	35	29	43	34	29	41	34	28	40	33	28	26
8	56	41	32	26	54	40	32	25	39	31	25	38	30	25	36	30	25	23
9	52	38	29	23	50	37	29	23	36	28	23	35	28	22	34	27	22	20
10	49	35	26	21	47	34	26	21	33	26	20	32	25	20	31	25	20	18