
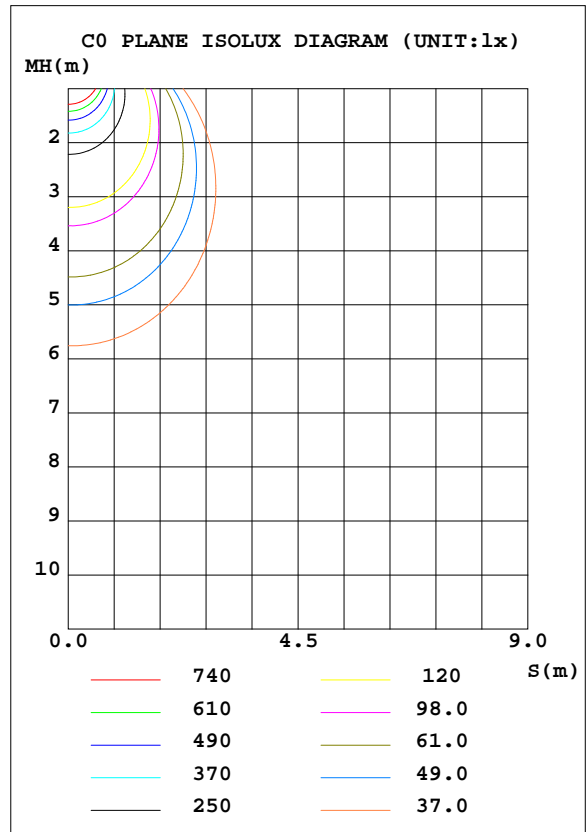


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.7V I:0.1240A P:29.20W PF:0.9760 Lamp Flux:4033.42x1 lm		
NAME: 136-311_4000K	TYPE:30W	WEIGHT:
DIM.:	SPEC.:4000K	SERIAL No.:1
MFR.: Tronix Lighting	SUR.:0.055X1.014	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 138.13 lm/W			
MODEL	136-311_4000K	I _{max} (cd)	1232	S/MH(C0/180)	1.29
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	1.22
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	4033.4	η UP, DN(C0-180)	3.9,46.5
NOMINAL FLUX(lm)	4033.42	CIE CLASS	DIRECT	η UP, DN(C180-360)	3.8,45.9
LAMPS INSIDE	1	η up(%)	7.7	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	240.7	η down(%)	92.3	CIBSE SHR MAX	1.35

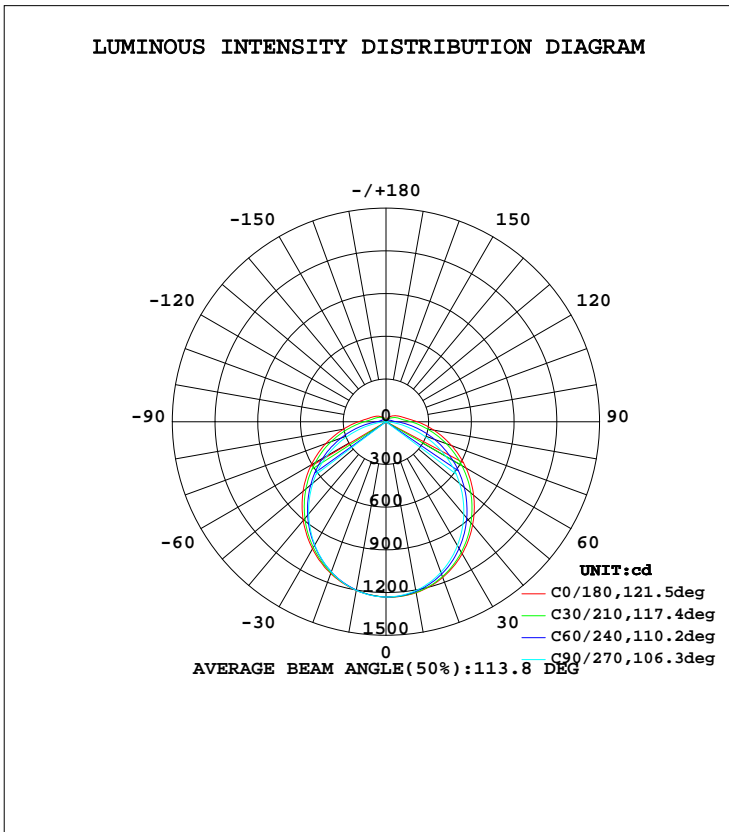


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-09-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:10.237m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	$\#lum, lamp$
10	1218	1214	1204	1202	1201	1201	1203	1213	0- 10	116.4	116.4	2.88,2.88
20	1164	1149	1126	1127	1134	1125	1123	1149	10- 20	332.3	448.6	11.1,11.1
30	1071	1043	1004	1016	1032	1012	999.6	1043	20- 30	500.8	949.5	23.5,23.5
40	947.3	905.1	849.8	876.0	904.3	871.1	844.8	906.7	30- 40	601.4	1551	38.4,38.4
50	803.7	747.6	675.7	718.6	760.2	712.6	670.4	750.2	40- 50	626.2	2177	54,54
60	649.4	579.0	484.7	551.6	607.0	544.1	481.0	582.6	50- 60	578.7	2756	68.3,68.3
70	490.6	407.0	278.6	382.5	450.3	373.2	277.1	411.5	60- 70	469.4	3225	80,80
80	341.6	244.9	89.52	226.2	305.0	216.7	86.59	251.4	70- 80	320.6	3546	87.9,87.9
90	220.7	127.6	3.528	119.3	195.0	110.9	2.880	129.0	80- 90	178.7	3724	92.3,92.3
100	145.2	76.80	3.870	76.33	130.9	70.94	3.648	82.01	90-100	100.3	3825	94.8,94.8
110	109.3	57.09	5.540	59.30	100.2	55.30	5.452	60.56	100-110	69.08	3894	96.5,96.5
120	84.85	41.75	7.434	47.74	78.90	44.69	7.221	44.47	110-120	50.21	3944	97.8,97.8
130	65.22	30.69	9.189	38.50	58.71	36.09	8.837	31.07	120-130	35.37	3979	98.7,98.7
140	48.74	23.38	10.73	30.62	45.30	28.70	10.02	22.80	130-140	23.86	4003	99.3,99.3
150	34.49	18.83	12.07	24.15	32.90	22.60	11.22	18.57	140-150	15.28	4019	99.6,99.6
160	23.72	15.99	13.15	18.93	21.86	17.72	12.23	15.51	150-160	8.983	4028	99.9,99.9
170	15.68	14.89	13.91	15.48	15.52	14.59	13.04	14.04	160-170	4.511	4032	100,100
180	14.89	14.34	14.26	14.38	14.82	14.37	14.21	14.36	170-180	1.384	4033	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

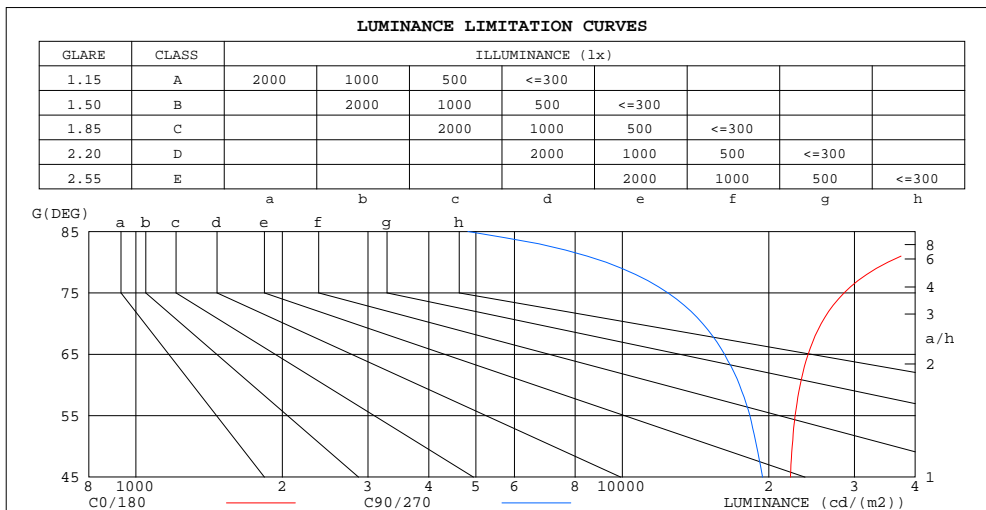

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	56671	4813
80	35149	9260
75	28565	12407
70	25632	14629
65	24099	16215
60	23210	17412
55	22659	18287
50	22341	18881
45	22155	19423


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-09-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
Humidity:65.0%
Test Distance:10.237m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.7V I:0.1240A P:29.20W PF:0.9760 Lamp Flux:4033.42x1 lm		
NAME: 136-311_4000K	TYPE:30W	WEIGHT:
DIM.:	SPEC.:4000K	SERIAL No.:1
MFR.: Tronix Lighting	SUR.:0.055X1.014	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.17	1.17	1.17	1.14	1.14	1.14	1.07	1.07	1.07	1.01	1.01	1.01	.95	.95	.95	.92
1.0	1.00	.96	.91	.97	.93	.89	.92	.88	.85	.86	.84	.81	.82	.79	.77	.75
2.0	.87	.80	.73	.84	.78	.72	.79	.74	.69	.75	.70	.66	.71	.67	.64	.61
3.0	.76	.67	.61	.74	.66	.60	.70	.63	.58	.66	.60	.56	.62	.58	.54	.51
4.0	.67	.58	.51	.65	.57	.50	.62	.54	.49	.58	.52	.47	.55	.50	.46	.43
5.0	.60	.51	.44	.58	.50	.43	.55	.48	.42	.52	.46	.41	.50	.44	.40	.37
6.0	.54	.45	.38	.52	.44	.38	.50	.42	.37	.47	.41	.36	.45	.39	.35	.33
7.0	.49	.40	.34	.47	.39	.33	.45	.38	.32	.43	.37	.32	.41	.35	.31	.29
8.0	.44	.36	.30	.43	.35	.30	.41	.34	.29	.40	.33	.28	.38	.32	.28	.26
9.0	.41	.32	.27	.40	.32	.27	.38	.31	.26	.36	.30	.25	.35	.29	.25	.23
10.0	.37	.30	.24	.37	.29	.24	.35	.28	.24	.34	.27	.23	.32	.27	.23	.21

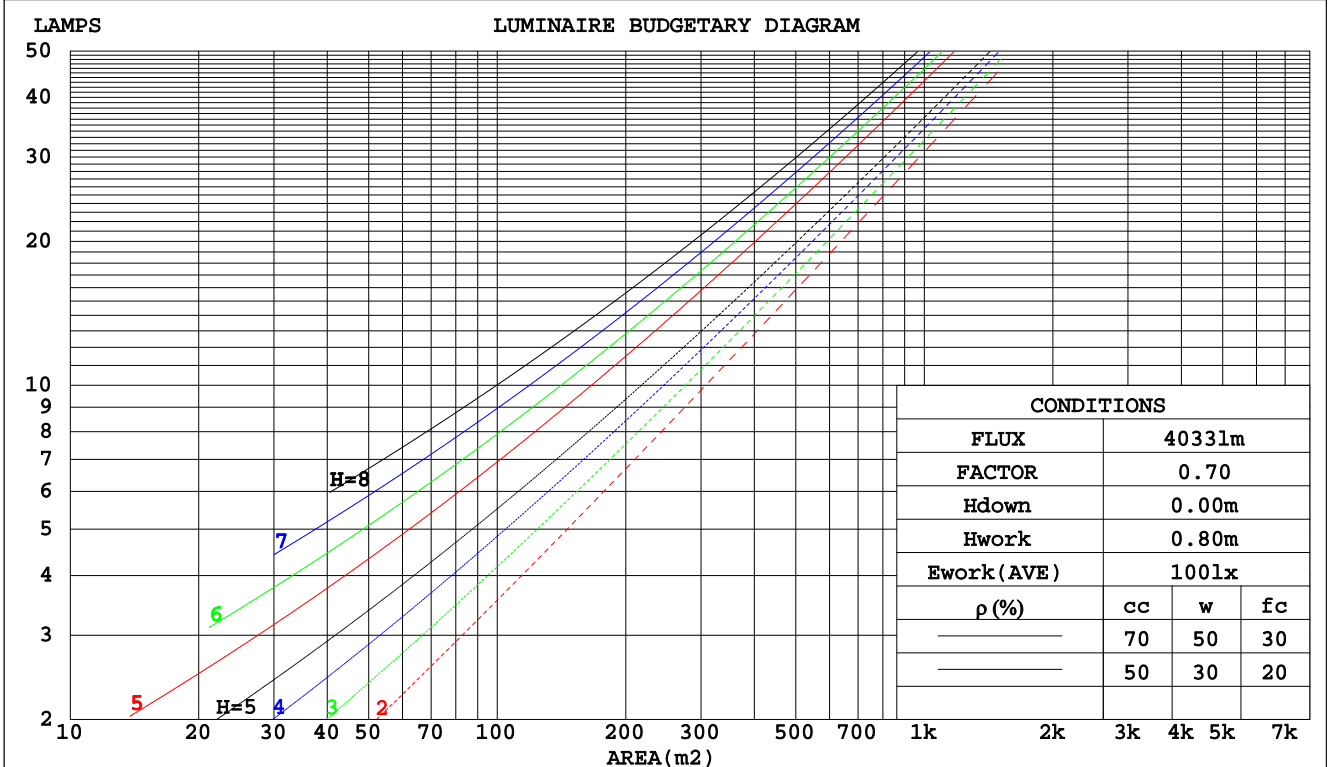

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-09-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:10.237m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:240.7V I:0.1240A P:29.20W PF:0.9760 Lamp Flux:4033.42x1 lm		
NAME: 136-311_4000K	TYPE:30W	WEIGHT:
DIM.:	SPEC.:4000K	SERIAL No.:1
MFR.: Tronix Lighting	SUR.:0.055X1.014	PROTECTION ANGLE:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.342	.194	.062	.332	.189	.060	.314	.180	.058	.298	.172	.055	.283	.164	.053	
2.0	.308	.169	.052	.300	.165	.051	.284	.158	.049	.269	.151	.047	.256	.145	.046	
3.0	.280	.149	.045	.272	.146	.044	.258	.140	.043	.245	.134	.041	.233	.129	.040	
4.0	.256	.133	.039	.249	.130	.038	.236	.125	.037	.224	.120	.036	.213	.116	.035	
5.0	.234	.119	.035	.228	.117	.034	.217	.113	.033	.206	.109	.032	.196	.105	.032	
6.0	.216	.108	.031	.211	.106	.031	.200	.103	.030	.191	.099	.029	.182	.096	.028	
7.0	.201	.099	.028	.196	.097	.028	.186	.094	.027	.177	.091	.026	.169	.088	.026	
8.0	.187	.091	.026	.182	.090	.025	.174	.087	.025	.166	.084	.024	.158	.081	.024	
9.0	.175	.084	.024	.171	.083	.023	.163	.080	.023	.155	.078	.022	.149	.075	.022	
10.0	.164	.079	.022	.160	.077	.022	.153	.075	.021	.146	.073	.021	.140	.070	.020	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.249	.249	.249	.213	.213	.213	.145	.145	.145	.083	.083	.083	.027	.027	.027	
1.0	.241	.215	.191	.207	.184	.164	.141	.127	.113	.081	.073	.066	.026	.024	.021	
2.0	.234	.191	.155	.200	.164	.134	.137	.114	.094	.079	.066	.055	.025	.021	.018	
3.0	.226	.174	.132	.194	.150	.115	.133	.104	.081	.077	.061	.047	.025	.020	.016	
4.0	.218	.161	.117	.187	.139	.102	.129	.097	.072	.074	.057	.042	.024	.018	.014	
5.0	.211	.151	.107	.181	.130	.093	.125	.091	.065	.072	.054	.039	.023	.017	.013	
6.0	.203	.143	.099	.175	.123	.086	.121	.086	.061	.070	.051	.036	.023	.017	.012	
7.0	.196	.136	.093	.169	.118	.081	.117	.083	.058	.068	.049	.034	.022	.016	.011	
8.0	.190	.130	.089	.163	.113	.078	.113	.079	.055	.066	.047	.033	.021	.015	.011	
9.0	.184	.125	.086	.158	.109	.075	.110	.076	.053	.064	.045	.032	.021	.015	.010	
10.0	.178	.121	.083	.153	.105	.072	.106	.074	.051	.062	.044	.031	.020	.014	.010	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-09-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:10.237m [K=1.0000]
 Remarks:

Uncorrected UGR Table

Test:U:240.7V I:0.1240A P:29.20W PF:0.9760 Lamp Flux:4033.42x1 lm										
NAME: 136-311_4000K					TYPE:30W			WEIGHT:		
DIM.:					SPEC.:4000K			SERIAL No.:1		
MFR.: Tronix Lighting					SUR.:0.055X1.014			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.5	24.9	23.8	25.3	25.6	22.4	23.8	22.8	24.2	24.5
3H	25.5	26.9	25.9	27.2	27.6	23.8	25.1	24.2	25.5	25.9
4H	26.6	27.9	27.0	28.3	28.7	24.3	25.5	24.7	25.9	26.3
6H	27.7	28.9	28.1	29.3	29.8	24.5	25.7	25.0	26.2	26.6
8H	28.3	29.5	28.7	29.9	30.3	24.6	25.8	25.0	26.2	26.6
12H	29.0	30.1	29.4	30.5	31.0	24.6	25.7	25.0	26.1	26.6
4H 2H	24.0	25.3	24.5	25.7	26.1	23.2	24.5	23.6	24.9	25.3
3H	26.3	27.4	26.8	27.9	28.3	24.8	25.9	25.3	26.4	26.8
4H	27.5	28.6	28.0	29.0	29.5	25.5	26.5	26.0	27.0	27.5
6H	28.8	29.8	29.4	30.2	30.8	25.9	26.8	26.4	27.3	27.9
8H	29.5	30.4	30.1	30.9	31.5	26.0	26.9	26.6	27.4	27.9
12H	30.3	31.1	30.9	31.7	32.2	26.1	26.9	26.6	27.4	27.9
8H 4H	27.8	28.7	28.4	29.2	29.7	26.1	26.9	26.6	27.4	28.0
6H	29.4	30.1	29.9	30.6	31.2	26.8	27.5	27.3	28.0	28.6
8H	30.3	30.9	30.8	31.5	32.1	27.0	27.7	27.6	28.2	28.8
12H	31.3	31.9	31.9	32.4	33.1	27.2	27.8	27.8	28.3	29.0
12H 4H	27.8	28.6	28.4	29.1	29.7	26.2	27.0	26.8	27.5	28.1
6H	29.5	30.1	30.0	30.7	31.3	27.1	27.7	27.6	28.3	28.9
8H	30.4	31.0	31.0	31.6	32.2	27.4	28.0	28.0	28.6	29.2
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117 Corrected 4033 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.8)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-09-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:10.237m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.7V I:0.1240A P:29.20W PF:0.9760 Lamp Flux:4033.42x1 lm		
NAME: 136-311_4000K	TYPE:30W	WEIGHT:
DIM.:	SPEC.:4000K	SERIAL No.:1
MFR.: Tronix Lighting	SUR.:0.055X1.014	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	54	42	35	53	42	35	51	41	34	28
0.80	63	51	44	62	51	43	60	50	43	35
1.00	71	60	52	70	59	51	67	60	51	43
1.25	78	67	59	77	66	59	73	64	58	49
1.50	83	73	65	81	71	64	78	69	63	54
2.00	90	81	74	88	79	73	84	76	70	61
2.50	95	86	79	92	84	78	87	80	75	65
3.00	98	90	84	95	88	82	90	84	79	69
4.00	102	96	90	99	93	88	94	89	85	74
5.00	105	99	94	102	97	92	96	92	88	77
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-09-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:10.237m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.7V I:0.1240A P:29.20W PF:0.9760 Lamp Flux:4033.42x1 lm		
NAME: 136-311_4000K	TYPE:30W	WEIGHT:
DIM.:	SPEC.:4000K	SERIAL No.:1
MFR.: Tronix Lighting	SUR.:0.055X1.014	PROTECTION ANGLE:

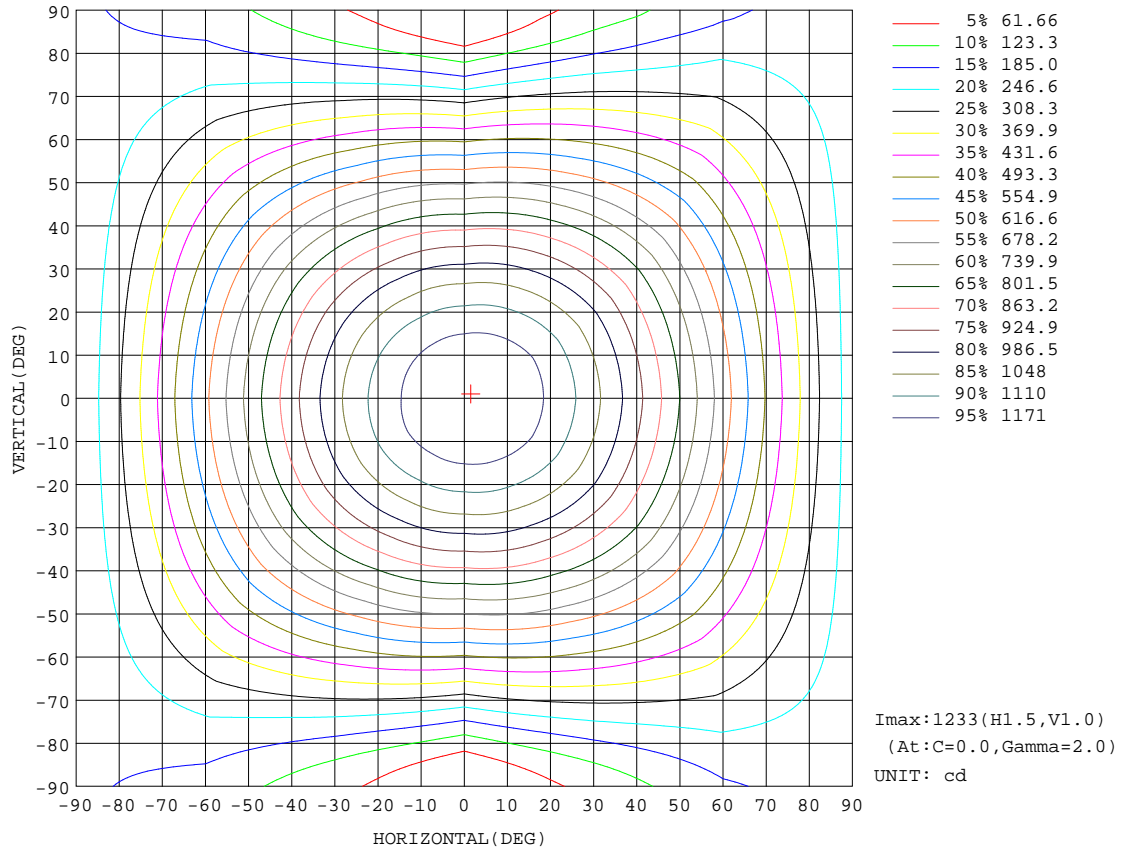


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-09-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:10.237m [K=1.0000]
 Remarks:

AAI Figure

Test:U:240.7V I:0.1240A P:29.20W PF:0.9760 Lamp Flux:4033.42x1 lm		
NAME: 136-311_4000K	TYPE:30W	WEIGHT:
DIM.:	SPEC.:4000K	SERIAL No.:1
MFR.: Tronix Lighting	SUR.:0.055X1.014	PROTECTION ANGLE:

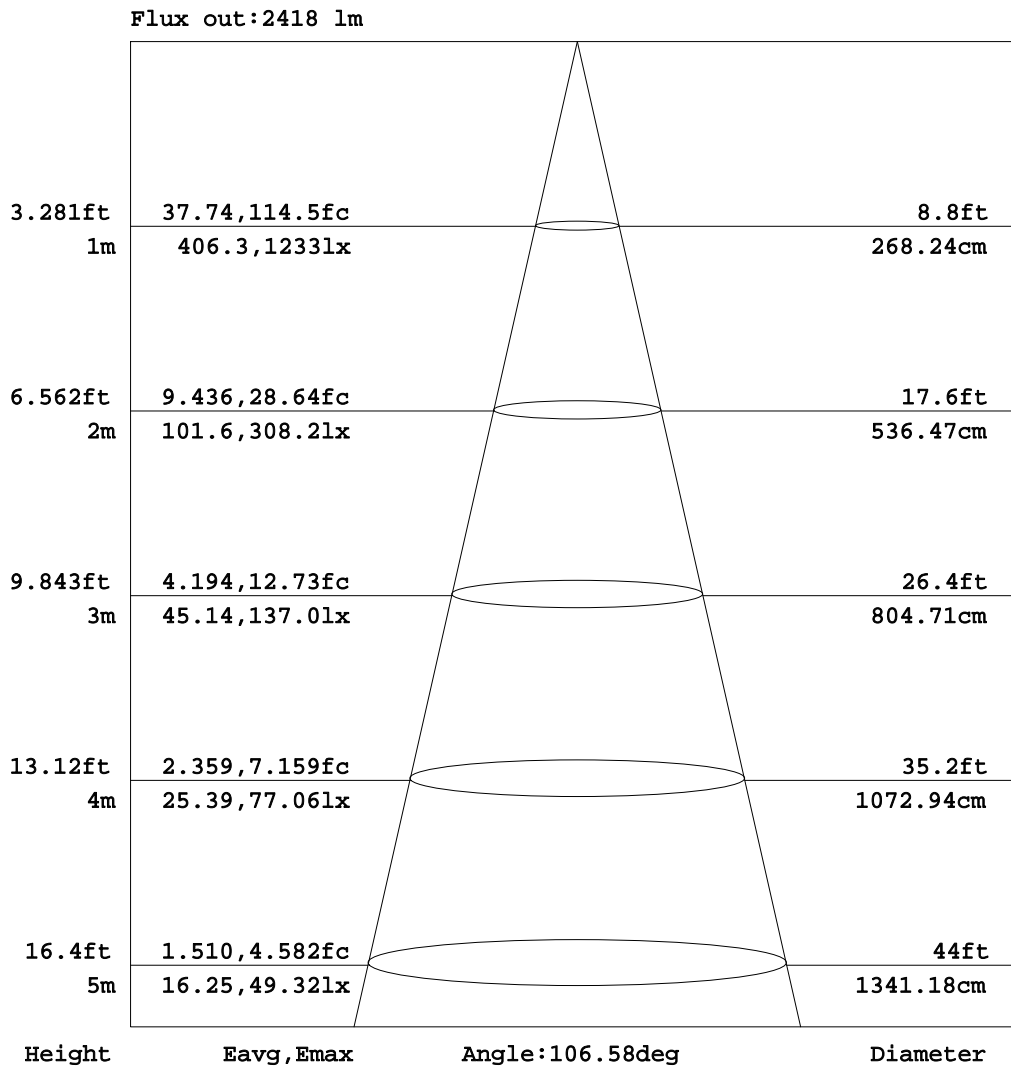


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-09-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:10.237m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:240.7V I:0.1240A P:29.20W PF:0.9760 Lamp Flux:4033.42x1 lm		
NAME: 136-311_4000K	TYPE:30W	WEIGHT:
DIM.:	SPEC.:4000K	SERIAL No.:1
MFR.: Tronix Lighting	SUR.:0.055X1.014	PROTECTION ANGLE:

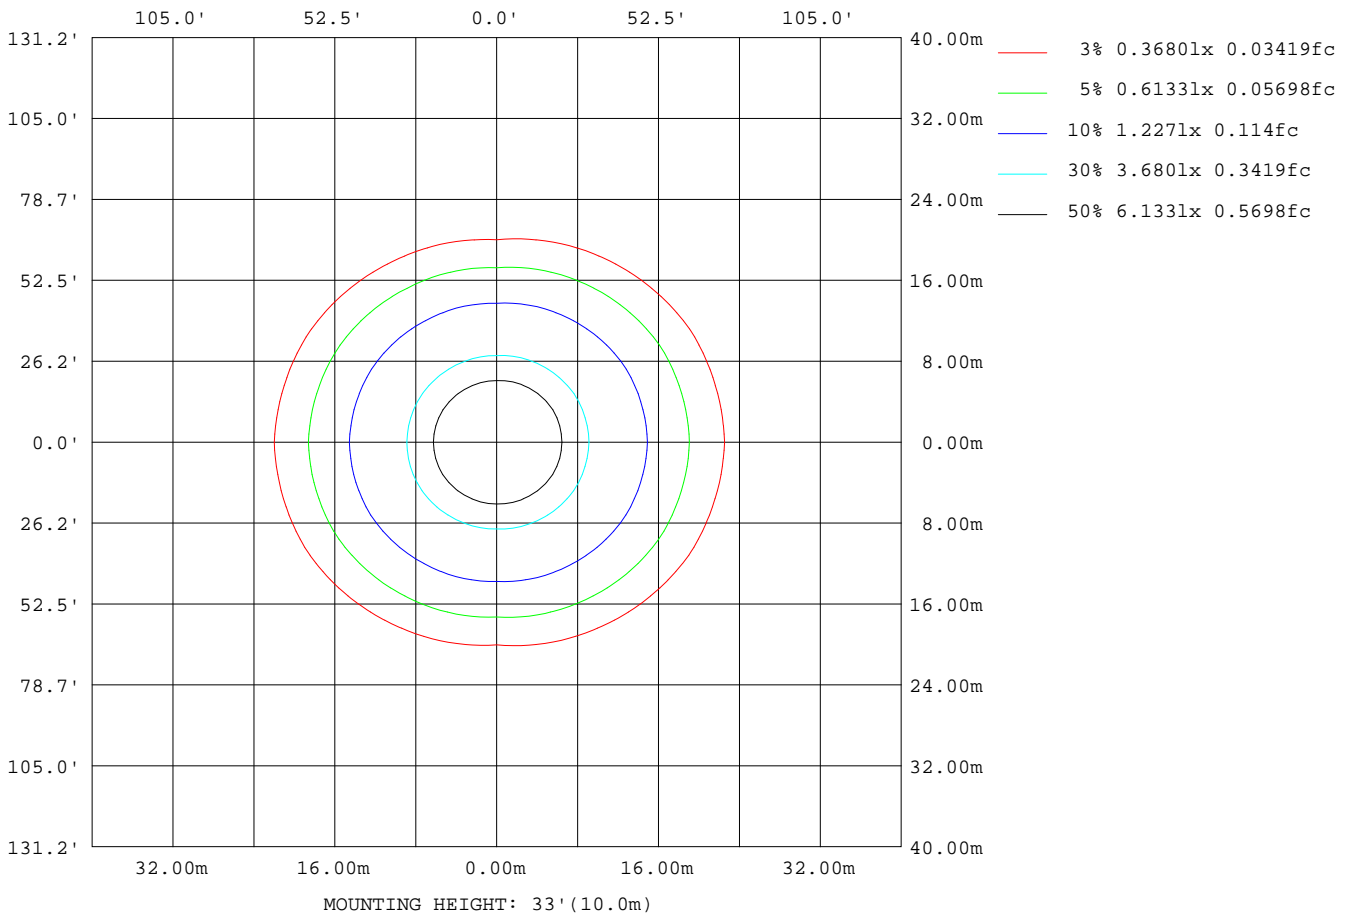

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-09-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:10.237m [K=1.0000]
 Remarks:

Planar Illuminance Curve

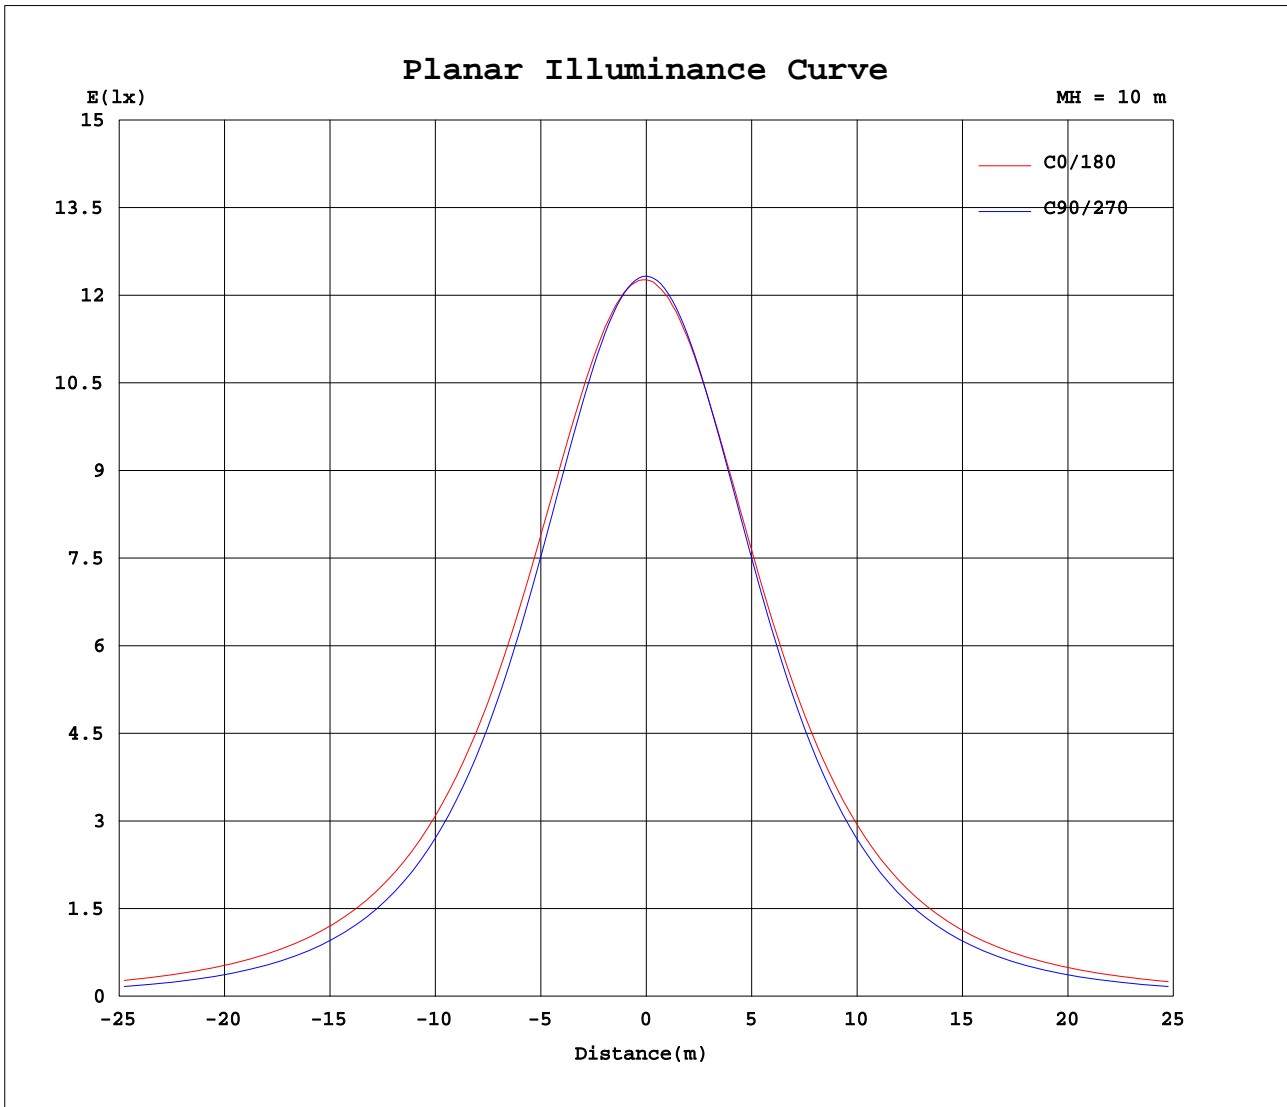

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2020-09-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity: 65.0%
 Test Distance: 10.237m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.7V I:0.1240A P:29.20W PF:0.9760 Lamp Flux:4033.42x1 lm		
NAME: 136-311_4000K	TYPE:30W	WEIGHT:
DIM.:	SPEC.:4000K	SERIAL No.:1
MFR.: Tronix Lighting	SUR.:0.055X1.014	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	1231	1231	1231	1231	1231	1231	1231	1231	1231	1231	1231	1231							
5	1230	1230	1227	1224	1222	1222	1221	1221	1222	1224	1226	1229							
10	1218	1217	1210	1204	1201	1202	1201	1201	1201	1203	1210	1217							
15	1197	1193	1181	1171	1168	1172	1173	1170	1167	1169	1180	1193							
20	1164	1158	1140	1126	1124	1131	1134	1129	1122	1123	1140	1158							
25	1121	1113	1088	1070	1070	1081	1087	1079	1067	1066	1088	1113							
30	1071	1058	1027	1004	1007	1024	1032	1021	1004	1000	1027	1059							
35	1011	997	958	930	937	960	970	956	933	926	959	998							
40	947	928	882	850	861	891	904	886	856	845	884	930							
45	877	855	802	765	781	817	834	812	775	760	804	857							
50	804	778	718	676	697	740	760	734	691	670	720	780							
55	727	698	631	584	611	662	684	654	604	578	634	701							
60	649	616	542	485	523	580	607	573	515	481	546	620							
65	570	533	452	382	434	499	528	491	425	379	457	537							
70	491	451	363	279	347	418	450	410	336	277	367	456							
75	414	370	275	179	261	340	374	332	251	177	281	376							
80	342	296	194	89.5	183	270	305	261	172	86.6	201	302							
85	276	230	126	23.4	119	209	245	201	109	19.5	134	236							
90	221	177	78.6	3.53	77.3	161	195	154	68.1	2.88	83.3	175							
95	176	136	53.8	3.19	55.9	127	157	121	49.0	2.90	59.8	140							
100	145	109	44.4	3.87	46.6	106	131	101	41.1	3.65	49.5	115							
105	125	94.9	38.1	4.68	40.9	92.5	114	88.1	36.2	4.56	42.4	98.9							
110	109	82.5	31.8	5.54	36.6	82.0	100	78.0	32.6	5.45	35.5	85.6							
115	96.3	72.2	27.3	6.49	33.2	73.0	88.9	69.6	29.7	6.35	29.5	72.1							
120	84.9	60.0	23.6	7.43	30.4	65.0	78.9	62.0	27.4	7.22	25.3	63.6							
125	74.6	50.0	21.0	8.36	28.0	57.8	69.7	55.1	25.3	8.06	22.3	51.0							
130	65.2	42.3	19.1	9.19	25.8	51.2	58.7	48.8	23.4	8.84	20.1	42.0							
135	56.6	35.6	17.8	10.0	23.8	45.0	52.4	42.8	21.5	9.36	18.2	35.3							
140	48.7	30.3	16.5	10.7	22.0	39.3	45.3	37.4	20.0	10.0	16.8	28.8							
145	41.5	25.9	15.4	11.4	20.3	34.1	38.7	32.5	18.5	10.7	15.6	25.0							
150	34.5	22.3	15.3	12.1	18.8	29.5	32.9	28.0	17.2	11.2	15.1	22.0							
155	28.5	19.4	15.2	12.6	17.1	25.4	27.5	23.9	15.8	11.8	14.8	19.2							
160	23.7	17.1	14.9	13.1	16.1	21.8	21.9	20.6	14.9	12.2	14.3	16.7							
165	17.8	16.2	14.6	13.6	15.3	18.4	17.9	17.2	14.2	12.6	13.9	15.4							
170	15.7	15.3	14.5	13.9	14.8	16.2	15.5	15.3	13.9	13.0	13.6	14.5							
175	15.0	14.6	14.3	14.2	14.5	14.9	15.0	14.8	14.3	14.0	14.3	14.7							
180	14.9	14.4	14.3	14.3	14.3	14.5	14.8	14.4	14.3	14.2	14.3	14.4							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-09-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:10.237m [K=1.0000]
 Remarks: