


1-10V dimming module || 12V~36V

ARTICLE NUMBER: 214-136

View this
product in
our
webshop

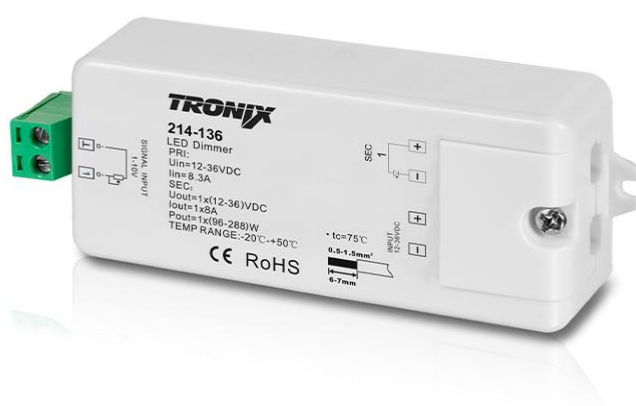

14.07.2026 - Disclaimer: information subject to change.



1-channel LED controller converting a 0/1–10V signal into a PWM output for single-colour lighting. 12–36V DC, max. 8 A. Ensures smooth, flicker-free dimming control.

Key product features

- **Type of control:** RF
- **Number of colour channels:** 1
- **Output voltage (V):** 12 – 36
- **Input voltage (V):** 12 – 36
- **Max. output current (A):** 8
- **Control type:** Voltage controlled

Technical specifications:

Product Name	1-10V dimming module 12V~36V
Ean	8714984910409
Outer box qty	1st
Model	Dynamic
Housing	Plastic housing
Programmable	No
Max. output current	8A
Output voltage	12 - 36V
Suitable for outdoor use	No
Degree of protection (IP)	IP20
Length	115mm
Width	36mm
Height	21mm
Number of colour channels	1, Single Colour
Suitable for surface mounting	Yes
Suitable for built-in mounting	No

14.07.2026 - Disclaimer: information subject to change.



Input voltage	12 - 36V
Control method	0/1-10V
DIN-rail mounting	No
Brand	Tronix Lighting
Compatible with Casambi	No
Control type	Constant voltage
Warranty	5 years

14.07.2026 - Disclaimer: information subject to change.