

Casambi | controller | SC/TW | 12~36V

ARTICLE NUMBER: 213-402

View this
product in
our
webshop



25.08.2026 - Disclaimer: information subject to change.



Casambi Bluetooth constant voltage LED controller for precise control of constant voltage LED strips. Developed for professional applications where flexible configuration, stable wireless communication and reliable dimming performance are required.

Key product features

- **Number of colour channels:** 2
- **Output voltage (V):** 12–36
- **Input voltage (V):** 12–36
- **Max. output current (A):** 10
- **Type of control:** Casambi
- **Control type:** Constant voltage Number of zones: 1

Technical specifications:


Product Name	Casambi controller SC/TW 12~36V
Ean	8714984954397
Outer box qty	1st
Model	Dynamic
Housing	Plastic housing
Programmable	Yes
Max. output current	10A
Output voltage	12 - 36V
Suitable for outdoor use	No
Degree of protection (IP)	IP20
Length	114mm
Width	38mm
Height	20mm
Number of zones	1
Number of colour channels	2, Tuneable White

25.08.2026 - Disclaimer: information subject to change.



Suitable for surface mounting	Yes
Suitable for built-in mounting	Yes
Input voltage	12 - 36V
Control method	Casambi
DIN-rail mounting	No
Brand	Tronix Lighting
Compatible with Casambi	Yes
Control type	Constant voltage
Warranty	5 years

25.08.2026 - Disclaimer: information subject to change.

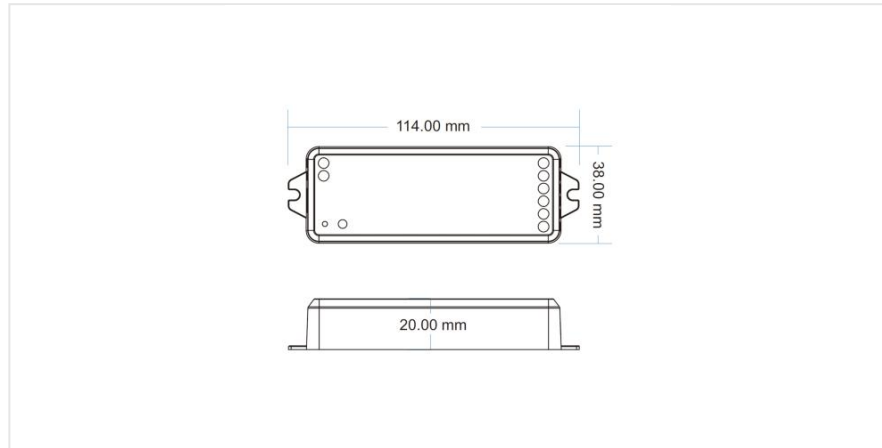

25.08.2026 - Disclaimer: information subject to change.



CARE



SHARE



CONNECT