

Casambi | controller | SC/TW/RGB(W+TW) | 12~24V

ARTICLE NUMBER: 213-403

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.



Casambi Bluetooth constant voltage LED controller for versatile control of multi-channel LED strips. Developed for professional lighting installations where flexibility, colour control and stable wireless communication are required.

Key product features

Number of colour channels: 5

Output voltage (V): 12–24

Input voltage (V): 12–24

Max. output current (A): 15

Type of control: Casambi

Control type: Constant voltage

Number of zones: 1

Technical specifications:

Product Name	Casambi controller SC/TW/RGB(W+TW) 12~24V
Ean	8714984954403
Outer box qty	1st
Model	Dynamic
Housing	Plastic housing
Programmable	Yes
Max. output current	15A
Output voltage	12 - 24V
Suitable for outdoor use	No
Degree of protection (IP)	IP20
Length	114mm
Width	38mm
Height	20mm
Number of zones	1
Number of colour channels	5, RGBTW

24.08.2026 - Disclaimer: information subject to change.



Suitable for surface mounting	Yes
-------------------------------	-----

Suitable for built-in mounting	Yes
--------------------------------	-----

Input voltage	12 - 24V
---------------	----------

Control method	Casambi
----------------	---------

DIN-rail mounting	No
-------------------	----


Brand	Tronix Lighting
-------	-----------------

Compatible with Casambi	Yes
-------------------------	-----

Control type	Constant voltage
--------------	------------------

Warranty	5 years
----------	---------

24.08.2026 - Disclaimer: information subject to change.

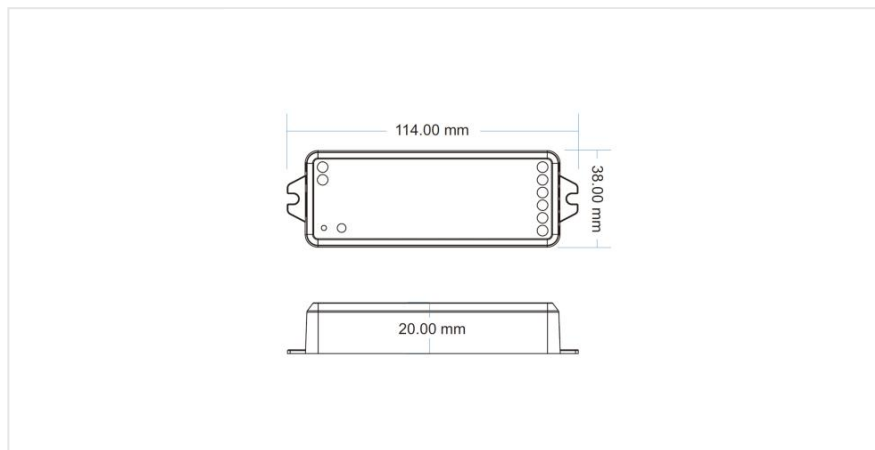

24.08.2026 - Disclaimer: information subject to change.