Casambi || receiver | 85~240V | 100W

ARTICLE NUMBER: 214-206

View this product in our webshop

CASAMBI



15.11.2026 - Disclaimer: information subject to change.

Surface-mounted Bluetooth dimmer for wireless control of 230V dimmable LED lamps, drivers or halogen lighting within Casambi networks. Operates without a gateway, via smartphone or tablet. Max. output power: 100 W.

Key product features

- **Light value memory:** Yes
- **Mounting method:** Surface-mounted
- **Nominal voltage (V):** 85 – 240
- **Control voltage (V):** 85 – 240
- **Dimming phase cut-off (trailing edge):** Yes
- **Max. switching power LED (W):** 100
- **Control type:** Casambi

Technical specifications:

Product Name	Casambi || receiver | 85~240V | 100W
Ean	8714984935945
Outer box qty	1st
Colour	White
Connection type	Push-in clamp
Operating method	Radio frequency (RF)
Control method	Casambi
Mounting method	Surface mounted
Material	Plastic
Material quality	Thermoplastic
Device width	75mm
Device height	38mm
Device depth	22mm
Applicable with presence indicator	Yes
Suitable for degree of protection (IP)	IP30


15.11.2026 - Disclaimer: information subject to change.

Applicable with movement sensor	Yes
Applicable with button	No
Applicable with transmission button	Yes
Applicable with time switch/timer	Yes
Nominal voltage	85 - 240V
Control voltage	85 - 240V
Min. depth of built-in installation box	23mm
Min. brightness controllable	Yes
Max. switching power LED	100W
Light value memory	Yes
Halogen free	Yes
RAL-number (similar)	9016
Core cross section	0.75 - 2.5mm??
Warranty	5 years

15.11.2026 - Disclaimer: information subject to change.





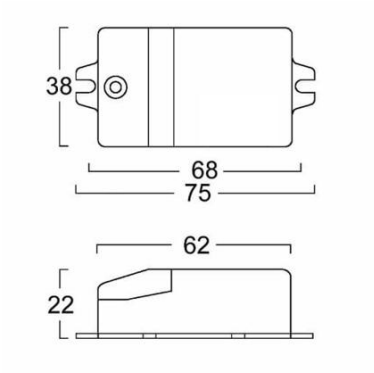

15.11.2026 - Disclaimer: information subject to change.