

RF | controller | RGB | 12~24V | push buttons

ARTICLE NUMBER: 213-005

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.



RF controller for RGB LED lighting with 3 integrated buttons for colour selection, mode setting and speed. Enables smooth control of colours, brightness and effects, with 10 dynamic programmes and support for remote control.

Key product features

- **Type of control:** RF
- **Number of colour channels:** 3
- **Output voltage (V):** 12 – 24
- **Input voltage (V):** 12 – 24
- **Max. output current (A):** 18
- **Control type:** Constant voltage

Technical specifications:

Product Name	RF controller RGB 12~24V push buttons
Ean	8714984952904
Outer box qty	1st
Model	Dynamic
Housing	Plastic housing
Programmable	No
Max. output current	18A
Output voltage	12 - 24V
Suitable for outdoor use	No
Degree of protection (IP)	IP20
Length	90mm
Width	40mm
Height	28mm
Number of zones	1
Number of colour channels	3, RGB

24.08.2026 - Disclaimer: information subject to change.



Suitable for surface mounting	Yes
Suitable for built-in mounting	Yes
Input voltage	12 - 24V
Control method	RF
DIN-rail mounting	No
Brand	Tronix Lighting
Compatible with Casambi	No
Control type	Constant voltage
Warranty	5 years

24.08.2026 - Disclaimer: information subject to change.




CARE



SHARE



CONNECT

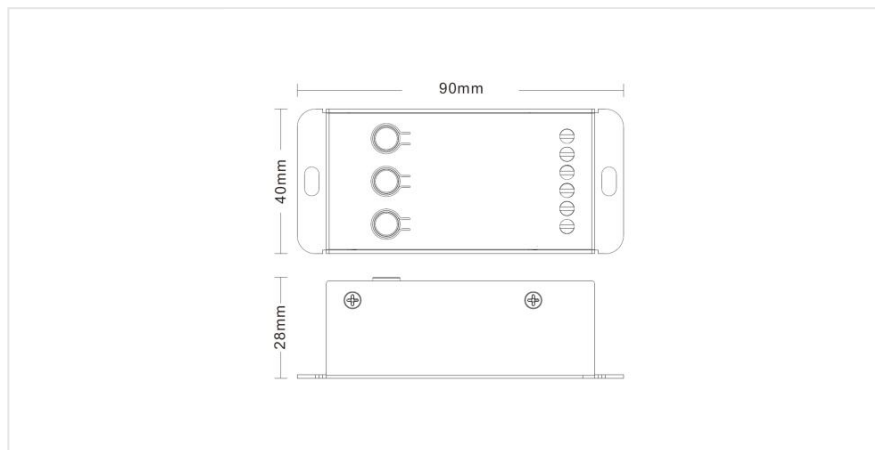

24.08.2026 - Disclaimer: information subject to change.