

RF | controller | RGBW | 12~48V | rotary control

ARTICLE NUMBER: 213-016

View this
product in
our
webshop



21.08.2026 - Disclaimer: information subject to change.



4-channel RF LED controller for RGB and RGBW lighting with individual rotary knobs and digital display. Controls colour, brightness and lighting effects per channel. Supports both local operation and wireless control.

Key product features

- **Type of control:** RF
- **Number of colour channels:** 4
- **Output voltage (V):** 12 – 48
- **Input voltage (V):** 12 – 48
- **Max. output current (A):** 16
- **Control type:** Constant voltage

Technical specifications:


Product Name	RF controller RGBW 12~48V rotary control
Ean	8714984953017
Outer box qty	1st
Model	Dynamic
Housing	Plastic housing
Programmable	No
Max. output current	16A
Output voltage	12 - 48V
Suitable for outdoor use	No
Degree of protection (IP)	IP20
Length	187mm
Width	46mm
Height	35.5mm
Number of zones	1
Number of colour channels	4, RGBW

21.08.2026 - Disclaimer: information subject to change.



Suitable for surface mounting	Yes
Suitable for built-in mounting	Yes
Input voltage	12 - 48V
Control method	RF
DIN-rail mounting	No
Brand	Tronix Lighting
Compatible with Casambi	No
Control type	Constant voltage
Warranty	5 years

21.08.2026 - Disclaimer: information subject to change.

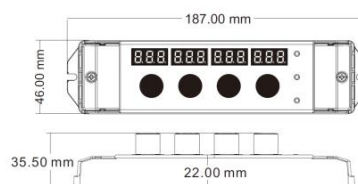

21.08.2026 - Disclaimer: information subject to change.