

RF | power supply | 24V | 150W

ARTICLE NUMBER: 213-703

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.



CARE



SHARE



CONNECT

RF LED driver with Push-dim function for single-colour LED lighting.
Combines wireless control with operation via a standard push button and delivers a stable 24 V output with a maximum power of 150 W.

Key product features

- **Control method:** RF
- **Number of colour channels:** 1
- **Output voltage (V):** 24 – 24
- **Input voltage (V):** 220 – 240
- **Output current (A):** 6.25
- **Control type:** Voltage controlled

Technical specifications:


Product Name	RF power supply 24V 150W
Ean	8714984954229
Outer box qty	25st
Housing	Plastic housing
Model	Static
Output voltage	0 - 24V
Output current	0 - 6.25mA
Suitable for outdoor use	No
Suitable for DC-voltage (primary side)	No
Output power	0 - 150W
Degree of protection (IP)	IP20
Length	310mm
Width	45mm
Height	30mm
Power consumption	150W

24.08.2026 - Disclaimer: information subject to change.



Input voltage	220 - 240V
Frequency input voltage	50 - 60Hz
PWM modulation	No
Overload protection	Yes
Overtemperature protection	Yes
Control method	RF
Short-circuit protected	Yes
Ambient temperature	-20 - 45??C
Driver lifetime	50000h
Number of colour channels	1
DIN-rail mounting	No
Brand	Tronix Lighting
Dimmable	Yes
Emergency power supply system	None
Control type	Constant voltage
Warranty	5 years

24.08.2026 - Disclaimer: information subject to change.

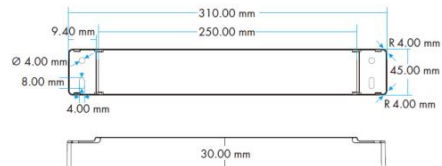

24.08.2026 - Disclaimer: information subject to change.



CARE



SHARE



CONNECT