

TRONIX




CASAMBI
READY

CE

Technical data	Single wall switch	Double wall switch
Article number	214-204	214-199
Channels	2	4
Radio signal	2,402...2,48 GHz, Bluetooth Low Energy (BLE)	
Signal range	Up to 10 meter in the same room	
Estimated lifetime	50.000 actuations	
Ambient temperature (ta)	-20...+65 °C	
Dimensions	81 x 81 x 14 mm	

- Radio switch for controlling i. a. Casambi devices
- Up to 4 freely programmable buttons (scenes, colour, ...)
- Initial programming could be via Android™ or Apple smartphone/tablet with an NFC interface!
- The Network mode must be set to „Balanced“
- The energy for the radio signal arises when pressing the button, by an electrodynamic energy generator; therefore no battery is needed, maintenance free
- Will be supplied with a frame Jäger Direkt Opus 55 Inform
- The middle part can be fitted with frames of other switch series, which have an internal dimension of 55x55mm, such as:
Jäger Direkt: Opus 55 Inform, Opus 55 Kubus, Opus 55 Fusion
Merten: 1-M, M-Smart, M-Arc, M-Plan, M-Creativ, M-Pure
Gira: Standard 55, E2, E3, Event, Esprit, ClassiX
Jung: AS 500, A 500, A plus, A creation, A creation Glas
Berker: S.1, B.1, B.3, B.7 Glas

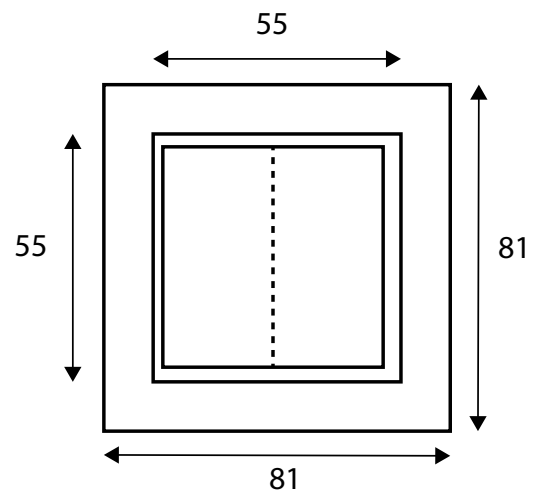

App for
iOS



App for
Android

