TRONIX guided by light

DMX | controller | 2 channels | DMX to trailing edge | DIN

ARTICLE NUMBER: 213-357

View this product in our webshop



16.11.2026 - Disclaimer: information subject to change.

CARE SHARE CONNECT

tronixlighting.com

This 2-channel AC trailing edge DMX512 dimmer for DIN rail mounting provides precise leading edge and trailing edge dimming control of 230V light sources within professional DMX installations.

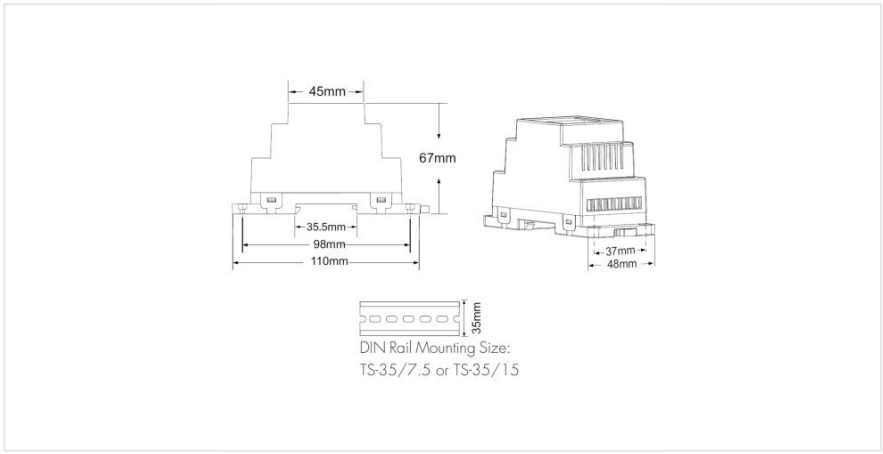
Key product features

- **Control method:** DMX
- **Number of colour channels:** 1
- **DIN rail mounting:** Yes
- **Output voltage (V):** 100 – 240
- **Input voltage (V):** 100 – 240
- **Max. output current (A):** 2
- **Number of zones:** 2

Technical specifications:

Product Name	DMX | controller | 2 channels | DMX to trailing edge | DIN
Ean	8714984953857
Outer box qty	1st
Colour	White
Connection type	Screwed terminal
Operating method	Other
Control method	DMX
Mounting method	Built-in
Material	Plastic
Material quality	Thermoplastic
Applicable with presence indicator	Yes
Suitable for degree of protection (IP)	IP20
Applicable with movement sensor	Yes
Applicable with button	Yes

Applicable with transmission button	No
Applicable with time switch/timer	Yes
Nominal voltage	100 - 240V
Control voltage	100 - 240V
Min. brightness controllable	Yes
Max. switching power LED	200W
Light value memory	Yes
Halogen free	Yes
RAL-number (similar)	9016
Core cross section	0.75 - 2.5mm??
Warranty	5 years


45mm
67mm
35.5mm
98mm
110mm
37mm
48mm
35mm
DIN Rail Mounting Size:
TS-35/7.5 or TS-35/15