

Philips driver | output prog. 0.15 - 0,5A | 20W | Casambi

ARTICLE NUMBER: 215-295

View this
product in
our
webshop




Xitanium Driver
CASAMBI



24.08.2026 - Disclaimer: information subject to change.



This Philips Xitanium Casambi LED driver is adjustable via SimpleSet to an output of 300 to 1050mA. SimpleSet is the latest technology from Philips, which makes it possible to wirelessly adjust the LED driver via NFC to a desired output. This means that only one LED driver is needed for multiple applications.

Casambi is an advanced light system based on Bluetooth low energy. Bluetooth low energy is the only wireless technology with low power that is used in all modern smartphones, tablets and even smart watches. It created an optimal solution with minimal hardware and implementation costs.

The Casambi app works as a user interface in Casambi systems, as a configuration tool, and also as a gateway. It works with IOS and Android devices such as smartphones, tablets and smartwatches.

Setting the output

- Easily install the MultiOne Configurator Software.
- Connect the MultiOne SimpleSet Interface and choose the Xitanium LED program configuration.
- Place the LED Driver to be configured on a dedicated platform with USB connection **(exclusive, available on request)**.
- The software displays a green check mark to confirm the configuration.
- Didn't choose the right output? Reprogramming with SimpleSet can easily be done in the same way.

Not in possession of the MultiOne Software? **Ask us to pre-set the SimpleSet drivers in a desired output!** sales@tronixlighting.com or +31 (0) 413 330 380.


Technical specifications:

Product Name	Philips driver output prog. 0.15 - 0,5A 20W Casambi
--------------	---

24.08.2026 - Disclaimer: information subject to change.

Ean	8714984935327
Outer box qty	40st
Housing	Plastic housing
Model	Static
Output voltage	24 - 54V
Output current	150 - 500mA
Suitable for outdoor use	No
Suitable for DC-voltage (primary side)	No
Output power	8.1 - 20W
Degree of protection (IP)	IP20
Length	97mm
Width	43mm
Height	30mm
Power consumption	20W
Input voltage	- - -V
Frequency input voltage	- - -Hz
Overload protection	Yes
Overtemperature protection	Yes
Control method	Casambi
Short-circuit protected	Yes
Ambient temperature	- - -??C
DIN-rail mounting	No
Brand	Philips
Dimmable	Yes
Emergency power supply system	None
Control type	Constant current
Warranty	5 years

24.08.2026 - Disclaimer: information subject to change.

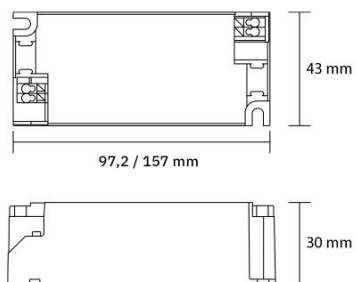

24.08.2026 - Disclaimer: information subject to change.