

136-347 20W specific configuration

Adj. downl | white | Ø180mm | 45° | 4000K | 18~30W | GST18i3

Introduction

Purpose of this Document

This document provides information for 136-347 20W. During measurement, the product is used in a different mode where output power, colour temperature and/or beam angle are changed from factory standard. These adjustments can be made without altering the product and are designed to be set by the installer. In most cases, the options are set through switches on the product.

Results

Total input power	19.5 W
Correlated Colour Temperature	4160 K
Total lumen output	2277 lm
Efficiency	117 lm/W

Electrical measurement details

Input Power


RMS Input voltage feed. V_{RMS}	232 V
RMS Input current feed. I_{RMS}	0.094 A
Total input power	19.5 W

Frequency of input power	50.1 Hz
Power factor	0.89
Displacement power factor	0.9

Total harmonic distortion of the current	15.27%
Total harmonic distortion of the voltage	2.48%

Input Power Curve

Voltage - Current

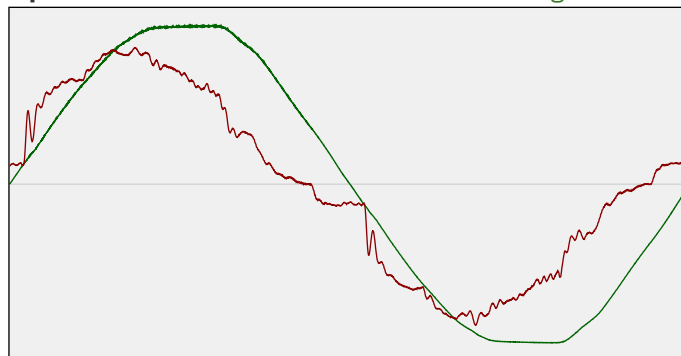

Efficiency


Radiated power efficiency: 36.2%

Lumen efficiency: 117 lm/W

Harmonics

3rd Harmonic	12.05%
5th Harmonic	5.61%
7th Harmonic	2.39%
9th Harmonic	4.07%
11th Harmonic	2.78%

Current Harmonics %

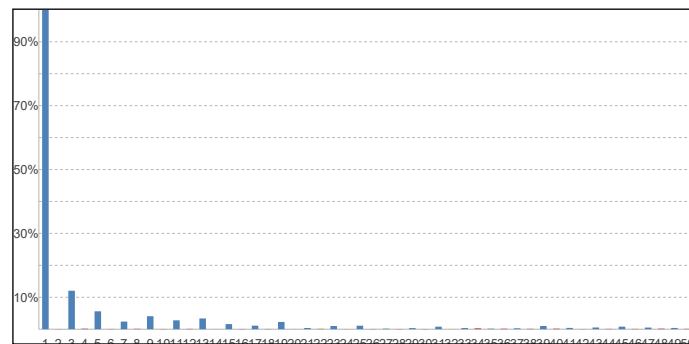


136-347 20W specific configuration

Colour measurement details


Total lumen output 2277 lm
 Correlated Colour Temperature 4160 K
 Colour coordinates CIE 1931 (x;y) = (0.374;0.373)
 Colour deviation from BBL Duv = 0.0002

TM30-18 Colour Fidelity Index R_f 85.9
 TM30-18 Colour Gamut Index R_g 97.0
 Colour Rendering Index (Ra) CRI 85.7
 Colour Rendering Index. (red component) R_9 = 20.5


Colour Quality Scale CQS = 84.8
 Television Lighting Consistency Index TLCI = 74

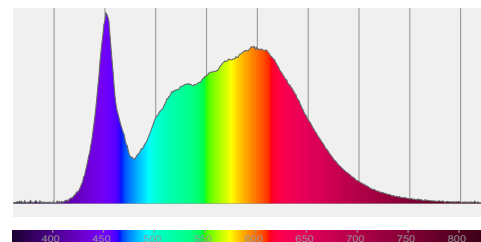

Relative spectral power distribution

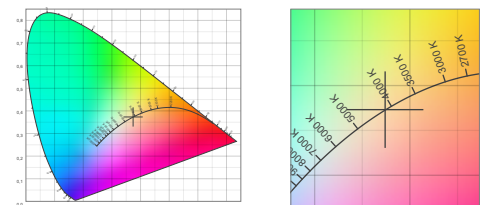

TM30 details

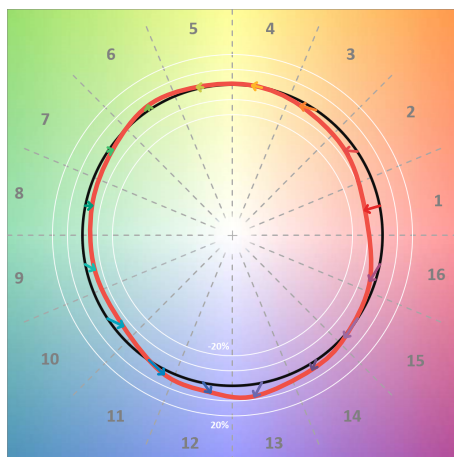


TM30 Colour vectors per hue bin




TM30 Colour distortion


Hue Bin	R_f	Shifts (%)	
		Chroma	Hue
C1	83	-10%	-1%
C2	86	-6%	5%
C3	80	-3%	10%
C4	89	0%	6%
C5	91	1%	4%
C6	94	3%	-1%
C7	94	-2%	-3%
C8	92	-5%	-1%
C9	89	-6%	5%
C10	81	-6%	10%
C11	80	2%	13%
C12	86	5%	6%
C13	87	8%	-6%
C14	88	4%	-5%
C15	80	0%	-15%
C16	80	-4%	-12%

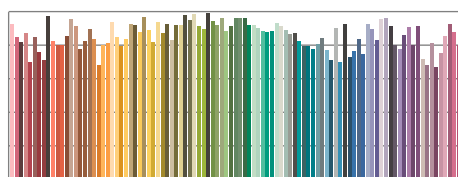

TM30-18 R_f -values per reference colour

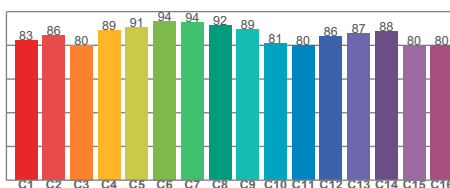


TM30-18 R_f -values per hue bin

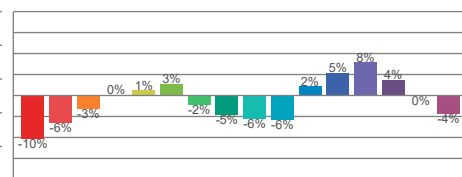


TM30 Chroma shift

Colour Quality details

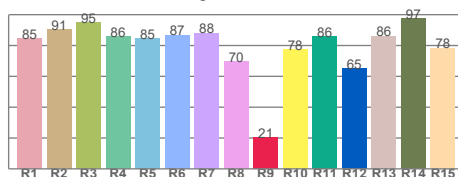

Colour Rendering Index

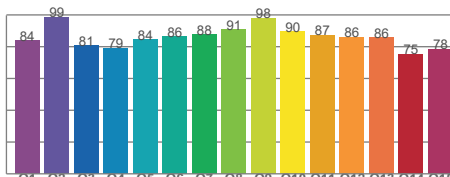

Colour Quality Scale