

Batten light flat | 1200mm | 30W | IP20 | 3-CCT

ARTICLE NUMBER: 136-311

View this
product in
our
webshop



13.08.2026 - Disclaimer: information subject to change.



Versatile and ultra-slim LED fixture with integrated 230V driver, adjustable colour temperature and wide beam. Ideal for tight spaces and task lighting.

Key product features:

- **Suitable for surface mounting:** Yes
- **Colour temperature (K):** 3000 – 5700
- **Length (mm):** 690
- **Width (mm):** 30
- **Height/depth (mm):** 20
- **Max. system power (W):** 18

Technical specifications:

Product Name	Batten light flat 1200mm 30W IP20 3-CCT
Ean	8714984939790
Outer box qty	24st
Dimmable	No
Connection type	Other
Lamp type	LED not exchangeable
Housing colour	White
Material	Plastic
Length	120cm
Length	1200mm
Width	57mm
Height/depth	28mm
With movement sensor	No
With presence detector	No
With light sensor	No

13.08.2026 - Disclaimer: information subject to change.

Colour of light	White
Colour temperature	3000 - 4000 - 5700K
Colour rendering index CRI	80-89
Colour of light adjustable	Positions
Luminous flux adjustable	No
Beam angle adjustable	No
Voltage type	AC
Nominal voltage	232 - 232V
Nominal current	124 - 124mA
Number of poles	3
Light distributor	Diffuser lens/optic/panel
Connectable conductor cross section	0.75 - 2.5mm ²
Type of control gear	LED operating device current-controlled
Exchangeable control gear	No
With control gear	Yes
Degree of protection (IP)	IP20
Impact strength	IK06
Rated lifetime L70/B50 at 25 °C	30000h
Max. system power	30W
Rated luminous flux according to IEC 62722-2-1	4200 - 4200lm
Luminaire efficacy	140lm/W
Power factor	0.98
Type of wiring	Ending
Suitable for emergency lighting	No
Emergency power supply system	None
Emergency function monitoring system	None

13.08.2026 - Disclaimer: information subject to change.



Warranty

3 years

13.08.2026 - Disclaimer: information subject to change.





CARE



SHARE



CONNECT

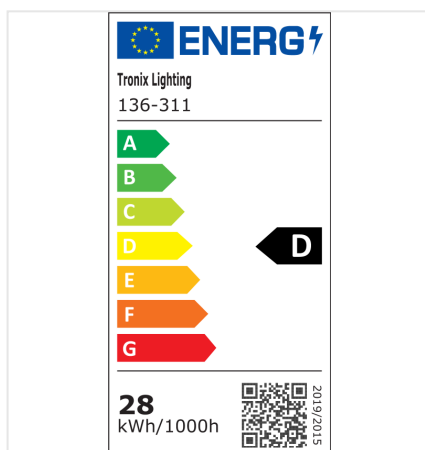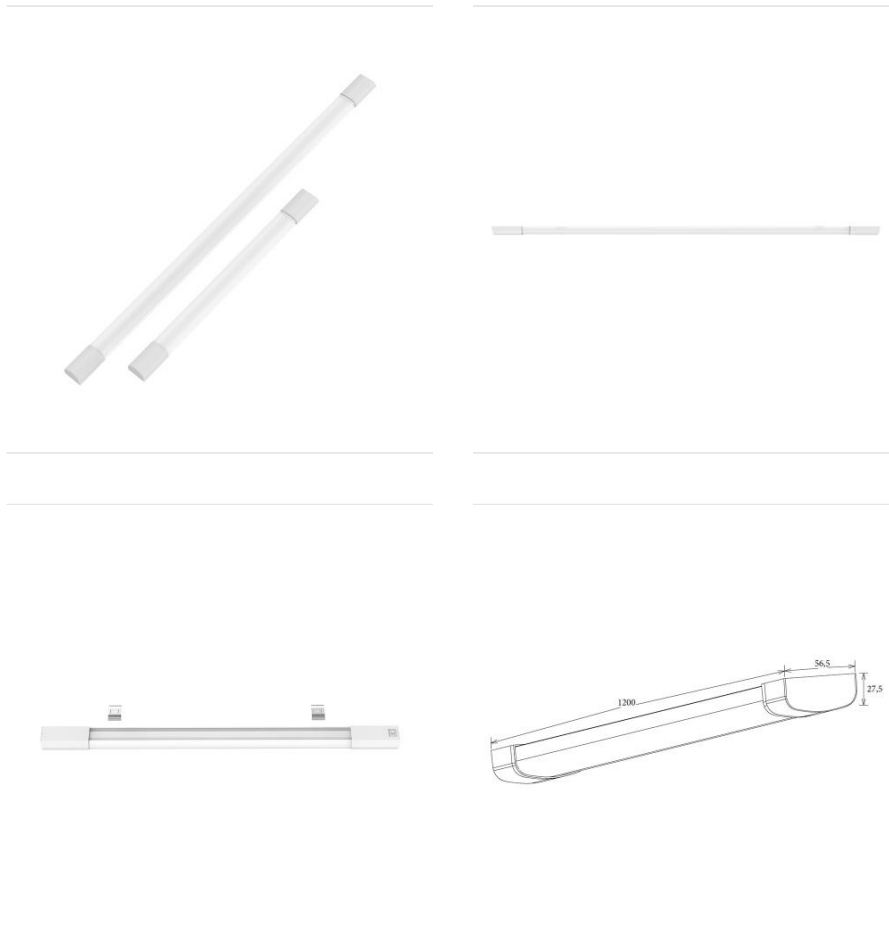

13.08.2026 - Disclaimer: information subject to change.