

Batten light flat | 690mm | 18W | IP20 | 3-CCT

ARTICLE NUMBER: 136-310

View this
product in
our
webshop



26.08.2026 - Disclaimer: information subject to change.



Versatile and ultra-slim LED fixture with integrated 230V driver, adjustable colour temperature and wide beam. Ideal for tight spaces and task lighting.

Key product features:

- **Suitable for surface mounting:** Yes
- **Colour temperature (K):** 3000 – 5700
- **Length (mm):** 1200
- **Width (mm):** 30
- **Height/depth (mm):** 20
- **Max. system power (W):** 30

Technical specifications:

Product Name	Batten light flat 690mm 18W IP20 3-CCT
Ean	8714984939783
Outer box qty	12st
Dimmable	No
Connection type	Other
Lamp type	LED not exchangeable
Housing colour	White
Material	Plastic
Length	60cm
Length	690mm
Width	57mm
Height/depth	28mm
With movement sensor	No
With presence detector	No
With light sensor	No

26.08.2026 - Disclaimer: information subject to change.

Colour of light	White
Colour temperature	3000 - 4000 - 5700K
Colour rendering index CRI	80-89
Colour of light adjustable	Positions
Luminous flux adjustable	No
Beam angle adjustable	No
Voltage type	AC
Nominal voltage	231 - 231V
Nominal current	75 - 75mA
Number of poles	3
Light distributor	Diffuser lens/optic/panel
Connectable conductor cross section	0.75 - 2.5mm??
Type of control gear	LED operating device current-controlled
Exchangeable control gear	No
With control gear	Yes
Degree of protection (IP)	IP20
Impact strength	IK06
Rated lifetime L70/B50 at 25 ??C	30000h
Max. system power	18W
Rated luminous flux according to IEC 62722-2- 1	2520 - 2520lm
Luminaire efficacy	140lm/W
Power factor	0.96
Type of wiring	Ending
Suitable for emergency lighting	No
Emergency power supply system	None
Emergency function monitoring system	None

26.08.2026 - Disclaimer: information subject to change.



Warranty

3 years

26.08.2026 - Disclaimer: information subject to change.





CARE



SHARE



CONNECT

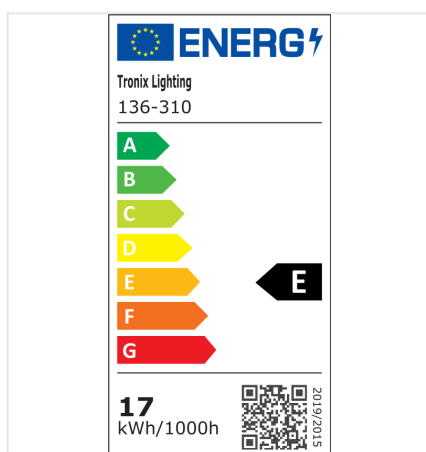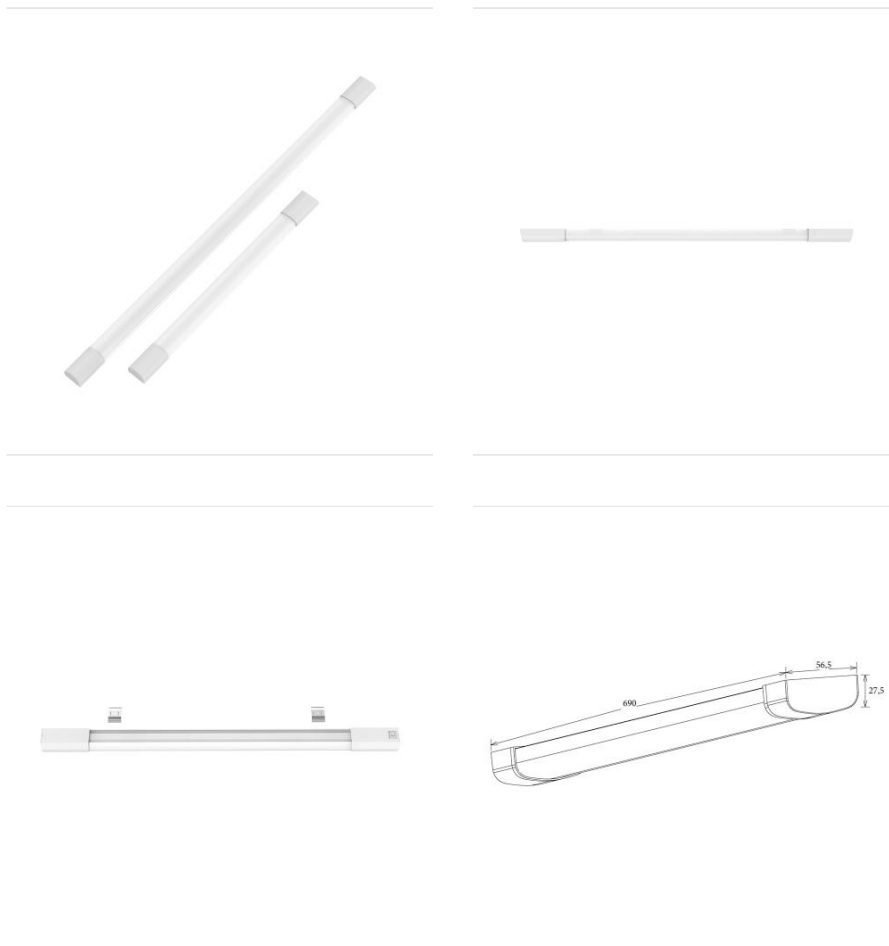

26.08.2026 - Disclaimer: information subject to change.