
TRONIX guided by light

LED driver | eldoLED ECOdrive | 12NA-E1Z0D-NL| 13W | DALI

ARTICLE NUMBER: 215-607

View this product in our webshop

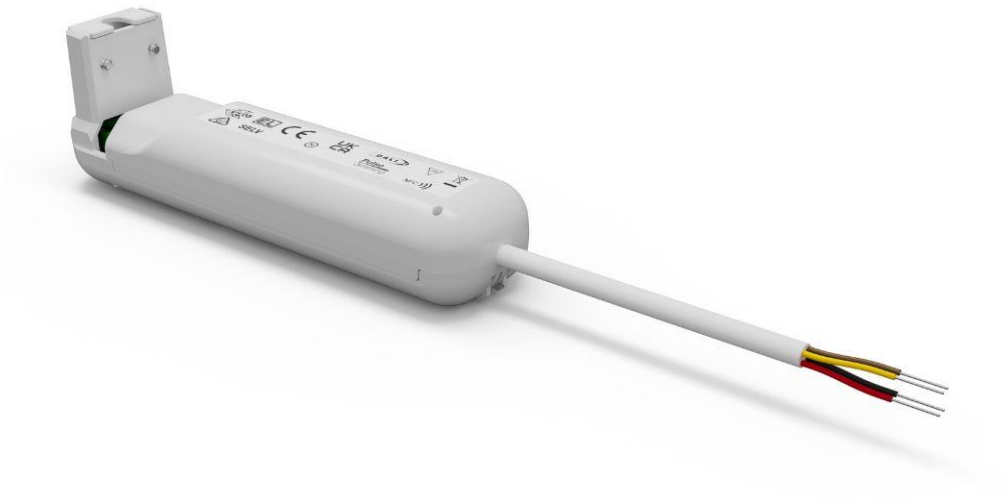

11.11.2026 - Disclaimer: information subject to change.

Ultra-compact 13W LED driver with DALI-2 and Pulse dimming to 1%, programmable via NFC. Includes strain relief and screw terminals. Ideal for installations with limited space.

Key product features:

- **Suitable for constant current:** Yes
- **Output current (mA):** Adjustable 150–700
- **Output power (W):** 13
- **Dimmable:** DALI-2, Pulse dim

Technical specifications:

Product Name	LED driver | eldoLED ECOdrive | 12NA-E1Z0D-NL| 13W | DALI
Ean	8714984950719
Outer box qty	75st
Housing	Plastic housing
Model	Static
Output voltage	5 - 43V
Output current	150 - 700mA
Suitable for outdoor use	No
Suitable for DC-voltage (primary side)	Yes
Output power	1 - 13W
Degree of protection (IP)	IP20
Length	128.8mm
Width	32mm
Height	42.6mm
Power consumption	13W
Input voltage	220 - 240V
Frequency input voltage	50 - 60Hz
Overload protection	Yes

Overtemperature protection	Yes
Control method	DALI
Short-circuit protected	Yes
Ambient temperature	-20 - 50°C
Driver lifetime	50000h
DIN-rail mounting	No
Brand	eldoLED
Dimmable	Yes
Emergency power supply system	Central (central battery)
Control type	Constant current
Warranty	5 years





11.11.2026 - Disclaimer: information subject to change.