TRONIX guided by light

LED driver | eldoLED POWERdrive 50SA-M4Z0X | 50W | DMX

ARTICLE NUMBER: 215-681

View this product in our webshop

eldoLED



12.11.2026 - Disclaimer: information subject to change.

The POWERdrive LED drivers from eldoLED feature four programmable outputs (constant current) and are fully adjustable to your needs. This makes it possible to make use of various light sources, dynamic effects and synchronizing light in multiple locations.

Features


- Can be combined with a variety of LED lighting, including RGBW or single color lighting on DMX
- Output current: 150 - 1400 mA
- Output voltage: 2 - 55 volts

Technical specifications:

Product Name	LED driver | eldoLED POWERdrive 50SA-M4Z0X | 50W | DMX
Ean	8714984943926
Outer box qty	40st
Housing	Plastic housing
Model	Static
Output voltage	2 - 55V
Output current	150 - 1400mA
Suitable for outdoor use	No
Suitable for DC-voltage (primary side)	Yes
Output power	50 - 50W
Degree of protection (IP)	IP20
Length	153mm
Width	76.2mm
Height	30.5mm
Power consumption	50W
Input voltage	120 - 250V
Frequency input voltage	50 - 60Hz

Overload protection	Yes
Overtemperature protection	Yes
Control method	DMX
Short-circuit protected	Yes
Ambient temperature	-20 - 50??C
Driver lifetime	50000h
DIN-rail mounting	No
Brand	eldoLED
Dimmable	Yes
Emergency power supply system	None
Control type	Constant current
Warranty	5 years



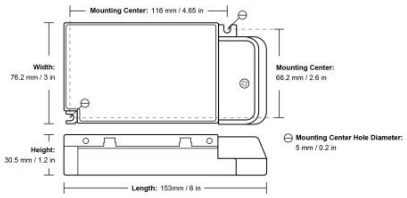

12.11.2026 - Disclaimer: information subject to change.