

LED strip | 24V | 60LED/m 5050 | 5m | IP20 | RGBTW 5in1

ARTICLE NUMBER: 127-085

View this
product in
our
webshop



04.08.2026 - Disclaimer: information subject to change.

RGBTW LED strip with 60 LEDs per meter for dynamic colour light and tunable white (2400K–6000K). Compatible with Zigbee, DALI, RF, Casambi and DMX control.

Key product features

- **Number of nodes per meter:** 60
- **Lamp power per meter (W):** 19.2
- **Colour temperature (K):** 2400 - 6000
- **Width (mm):** 12
- **Length of particular sections (mm):** 100
- **Degree of protection (IP):** IP20
- **Colour of light:** Multicolour

Technical specifications:


Product Name	LED strip 24V 60LED/m 5050 5m IP20 RGBTW 5in1
Ean	8714984940574
Outer box qty	25st
Model	Strip
Lamp type	LED not exchangeable
Lamp voltage	0 - 24V
Number of nodes per meter	60
Lamp power per meter	19.2W
Beam angle	120°
Voltage type	DC
Type of control gear	LED operating device voltage-controlled
Input voltage tracklights	24V
With protective cover	No
Length of particular segments	100mm
Degree of protection (IP)	IP20

04.08.2026 - Disclaimer: information subject to change.



Self-adhesive	Yes
Luminous flux per meter	327lm
Total length	5m
Width	12mm
Height/depth	2mm
Colour of light	Multi-coloured
Suitable for dimmer	Yes
Colour rendering index CRI	80-89
Exchangeable control gear	Yes
Connection type	Other
Rated lifetime L70/B50 at 25 °C	54000h
Colour of light adjustable	Continuously variable
Luminous flux per foot	99.67lm
Luminous flux adjustable	Continuously variable
LED type	SMD
Max. system power	96W
Beam angle adjustable	No
Luminaire efficacy	88lm/W
Power factor	1
Type of wiring	Loop-through wiring included
Number of poles	6
Connectable conductor cross section	0.5 - 2.5mm ²
Colour temperature	RGBTW
Warranty	3 years
Ambient temperature	-20 - 50°C
Lowest bending radius	50mm

04.08.2026 - Disclaimer: information subject to change.

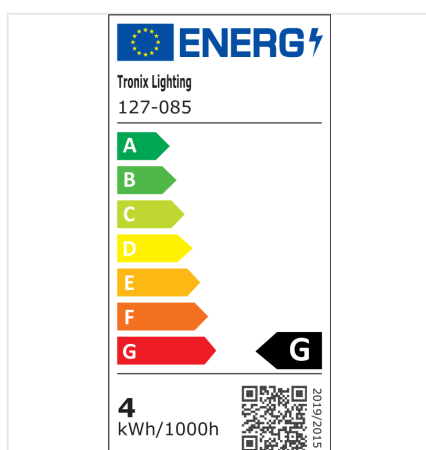

04.08.2026 - Disclaimer: information subject to change.