

LED strip | 24V | 60LED/m 5050 | 5m | IP20 | RGBW 4in1

ARTICLE NUMBER: 127-075

View this
product in
our
webshop



04.08.2026 - Disclaimer: information subject to change.



RGBW LED strip with 60 LEDs per metre for powerful colour lighting and warm white (2700K). Suitable for various control systems such as DMX, DALI, Zigbee, Casambi and DimmIt.

Key product features:

- **Number of light sources per metre:** 60
- **Lamp power per metre (W):** 19.2
- **Colour temperature (K):** 2700
- **Width (mm):** 12
- **Length of single sections (mm):** 100
- **Degree of protection (IP):** IP20
- **Light colour:** RGBW




Technical specifications:

Product Name	LED strip 24V 60LED/m 5050 5m IP20 RGBW 4in1
Ean	8714984919648
Outer box qty	25st
Model	Strip
Lamp type	LED not exchangeable
Lamp voltage	0 - 24V
Number of nodes per meter	60
Lamp power per meter	19.2W
Beam angle	120°
Voltage type	DC
Type of control gear	LED operating device voltage-controlled
Input voltage tracklights	24V
With protective cover	No
Length of particular segments	100mm
Degree of protection (IP)	IP20

04.08.2026 - Disclaimer: information subject to change.

Self-adhesive	Yes
Luminous flux per meter	380lm
Total length	5m
Width	12mm
Height/depth	2mm
Colour of light	RGBW
Suitable for dimmer	Yes
Colour rendering index CRI	90-100
Exchangeable control gear	Yes
Connection type	Other
Rated lifetime L70/B50 at 25 °C	54000h
Colour of light adjustable	Continuously variable
Luminous flux per foot	115.82lm
Luminous flux adjustable	Continuously variable
LED type	SMD
Max. system power	96W
Beam angle adjustable	No
Luminaire efficacy	80lm/W
Power factor	1
Type of wiring	Loop-through wiring included
Number of poles	5
Connectable conductor cross section	0.5 - 2.5mm ²
Colour temperature	RGBW
Warranty	3 years
Ambient temperature	-20 - 50°C
Lowest bending radius	50mm

04.08.2026 - Disclaimer: information subject to change.

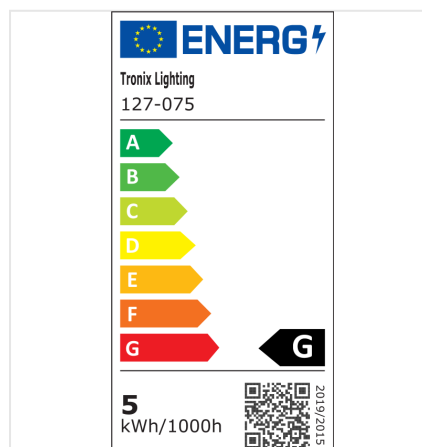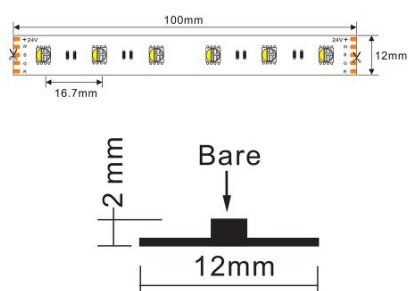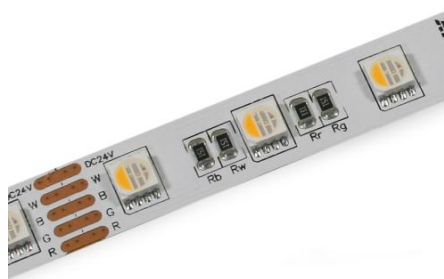

04.08.2026 - Disclaimer: information subject to change.