

LED strip | COB 480LED/m | 4mm | 5W/m |
IP20 | 6500K | CRI90

ARTICLE NUMBER: 127-155

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.



Ultra-narrow COB LED strip of just 4 mm wide with seamless light line thanks to Chip-on-Board technology. Ideal for refined lighting accents in compact profiles, furniture or displays.

Key product features:

- **Beam angle (°):** 180
- **Lamp power per meter (W):** 5
- **Colour temperature (K):** 6500
- **Width (mm):** 4
- **Length of particular sections (mm):** 50
- **Degree of protection (IP):** IP20
- **Luminous flux per meter (Lm):** 573


Technical specifications:

Product Name	LED strip COB 480LED/m 4mm 5W/m IP20 6500K CRI90
Ean	8714984940772
Outer box qty	25st
Model	Strip
Lamp type	LED not exchangeable
Lamp voltage	0 - 24V
Number of nodes per meter	480
Lamp power per meter	5W
Beam angle	180°
Voltage type	DC
Type of control gear	LED operating device voltage-controlled
Input voltage tracklights	24V
With protective cover	No
Length of particular segments	50mm
Degree of protection (IP)	IP20

24.08.2026 - Disclaimer: information subject to change.

Self-adhesive	Yes
Luminous flux per meter	500lm
Total length	5m
Width	4mm
Height/depth	2mm
Colour of light	White
Suitable for dimmer	Yes
Colour rendering index CRI	90-100
Exchangeable control gear	Yes
Connection type	Other
Rated lifetime L70/B50 at 25 °C	54000h
Colour of light adjustable	No
Luminous flux per foot	152.4lm
Luminous flux adjustable	Continuously variable
LED type	COB
Max. system power	25W
Beam angle adjustable	No
Luminaire efficacy	100lm/W
Power factor	1
Type of wiring	Loop-through wiring included
Number of poles	2
Connectable conductor cross section	0.5 - 2.5mm ²
Colour temperature	6500K
Warranty	3 years
Ambient temperature	-20 - 50°C
Lowest bending radius	10mm

24.08.2026 - Disclaimer: information subject to change.

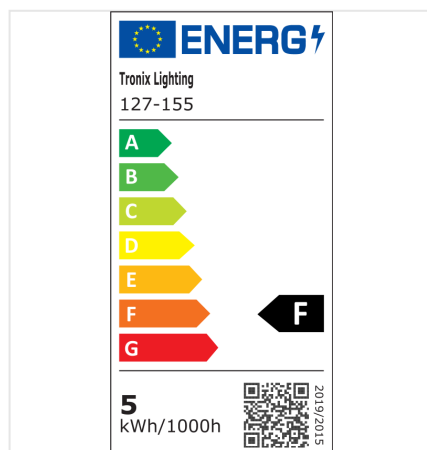

24.08.2026 - Disclaimer: information subject to change.