
TRONIX guided by light

Power supply | 24V | 75W | trailing edge | indoor

ARTICLE NUMBER: 215-436

View this product in our webshop

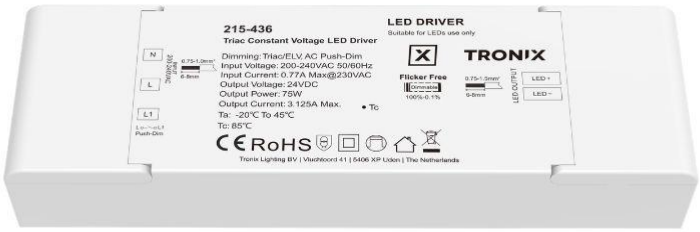

15.11.2026 - Disclaimer: information subject to change.

CARE SHARE CONNECT

tronixlighting.com

This 24V constant voltage 75W LED driver combines phase dimming with Push-Dim. The compact housing, extensive protection features and 5-year warranty make it suitable for a wide range of professional LED installations.

Key product features

- **Suitable for constant voltage:** Yes
- **Output voltage (V):** 24
- **Output power (W):** 1 – 75
- **Trailing-edge dimmable:** Yes
- **Leading-edge dimmable:** Yes
- **Input voltage (V):** 200 - 240
- **Control type:** Voltage controlled


Technical specifications:

Product Name	Power supply | 24V | 75W | trailing edge | indoor
Ean	8714984956360
Outer box qty	50st
Housing	Plastic housing
Model	Static
Output voltage	24 - 24V
Output current	3125 - 3125mA
Suitable for outdoor use	No
Suitable for DC-voltage (primary side)	No
Output power	0 - 75W
Degree of protection (IP)	IP20
Length	179mm

15.11.2026 - Disclaimer: information subject to change.

Width	56mm
Height	30mm
Power consumption	75W
Input voltage	200 - 240V
Frequency input voltage	50 - 60Hz
Overload protection	Yes
Overtemperature protection	Yes
Control method	Trailing edge dimming
Short-circuit protected	Yes
Ambient temperature	-20 - 45°C
Driver lifetime	50000h
Number of colour channels	1
DIN-rail mounting	No
Brand	Tronix Lighting
Dimmable	Yes
Emergency power supply system	None
Control type	Constant voltage
Warranty	5 years
Suitable for DIN rail (top hat rail) mounting	No
Interface Pulse Width Modulation (PWM)	No

15.11.2026 - Disclaimer: information subject to change.

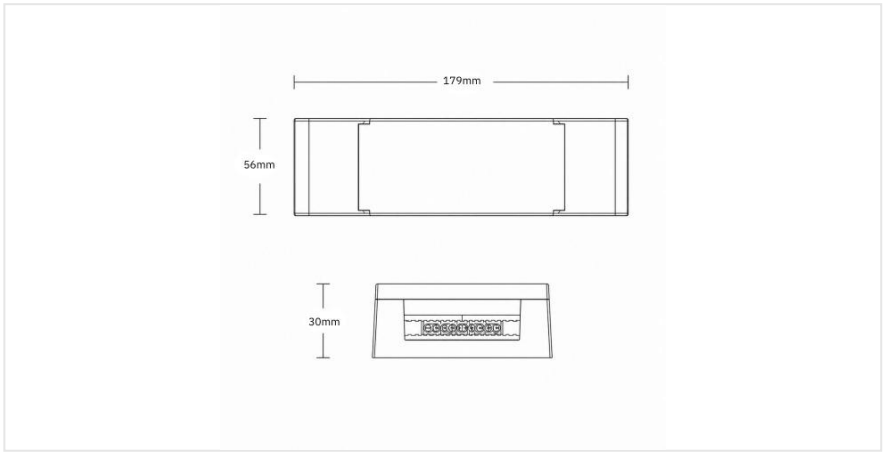

15.11.2026 - Disclaimer: information subject to change.