

Street light 110W || 4000K | Cree LED | Philips driver

ARTICLE NUMBER: 220-052

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.



This powerful LED street light is made of solid materials and equipped with the latest technology, such as the internal Philips driver and surge protection. This allows you to enjoy high quality lighting which spreads well through public spaces. An excellent choice for street or area lighting.

Features

- LED type Cree XP-G3
- Power supply incl. internal Philips driver
- Beam angle 90°


Technical specifications:

Product Name	Street light 110W 4000K Cree LED Philips driver
Ean	8714984932944
Outer box qty	1st
Dimmable	No
Type	Streetlight
Lamp type	LED not exchangeable
Lamp holder	None
Housing colour	Anthracite
Housing material	Aluminium
Material cover	Glass transparent
Connection type	Push-in clamp
Mounting method	Post top/side entry
Length	762mm
Width	370mm
Height/depth	130mm
Colour of light	White
Colour consistency (McAdam ellipse)	SDCM6
Colour temperature	4000 - 4000K

24.08.2026 - Disclaimer: information subject to change.

Colour rendering index CRI	70-79
Voltage type	AC
Nominal voltage	230 - 230V
Nominal current	478 - 478mA
Suitable for lamp power	0 - 0W
Suitable for spigot size	60 - 60mm
Number of poles	3
Light source included	Yes, fixed LED
Light distributor	Other
With connection cable	No
Connectable conductor cross section	0.75 - 2.5mm??
Type of control gear	LED operating device current-controlled
Exchangeable control gear	No
With control gear	Yes
Degree of protection (IP)	IP65
Surface protection	Powder coating
Impact strength	IK08
Rated lifetime L70/B50 at 25 ??C	50000h
Max. system power	110W
Rated luminous flux according to IEC 62722-2- 1	14300 - 14300lm
Luminaire efficacy	120lm/W
Power factor	0.9
Type of wiring	Ending
Warranty	3 years
Ambient temperature	-20 - 45??C

24.08.2026 - Disclaimer: information subject to change.

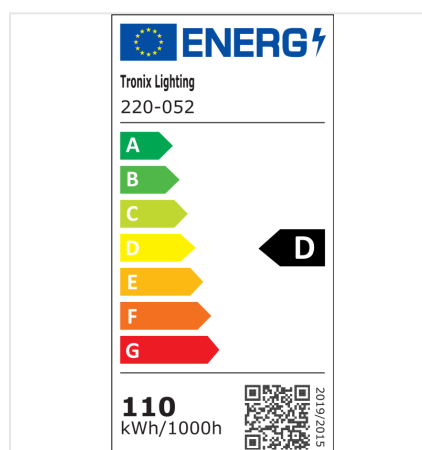

24.08.2026 - Disclaimer: information subject to change.