

136-344 15W specific configuration

Adj. downl | white | Ø180mm | 45° | 3000K | 6~15W | GST18i3

Introduction

Purpose of this Document

This document provides information for 136-344 15W. During measurement, the product is used in a different mode where output power, colour temperature and/or beam angle are changed from factory standard. These adjustments can be made without altering the product and are designed to be set by the installer. In most cases, the options are set through switches on the product.

Results

Total input power	14.0 W
Correlated Colour Temperature	3115 K
Total lumen output	1643 lm
Efficiency	117 lm/W

Electrical measurement details

Input Power


RMS Input voltage feed. V_{RMS}	229 V
RMS Input current feed. I_{RMS}	0.063 A
Total input power	14.0 W

Frequency of input power	50 Hz
Power factor	0.97
Displacement power factor	0.97

Total harmonic distortion of the current	8.9%
Total harmonic distortion of the voltage	2.78%


Input Power Curve

Voltage - Current

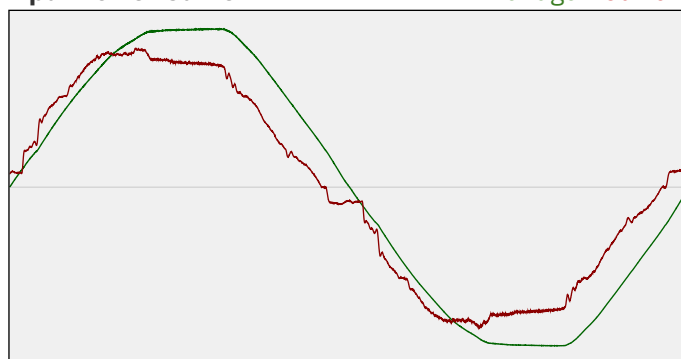

Efficiency

Radiated power efficiency: 36.0%




Lumen efficiency: 117 lm/W



Harmonics

3rd Harmonic	3.32%
5th Harmonic	7.05%
7th Harmonic	0.33%
9th Harmonic	1.99%
11th Harmonic	1.4%

Current Harmonics %

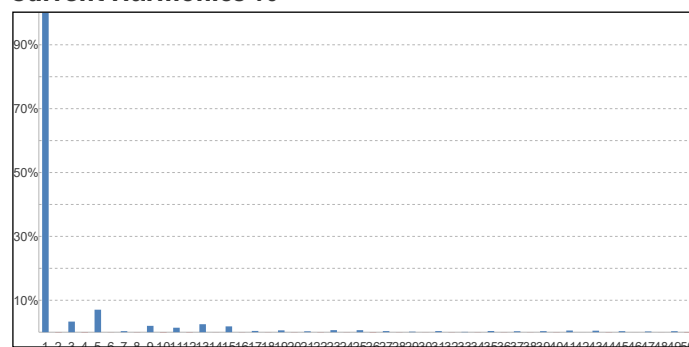


136-344 15W specific configuration

Colour measurement details



Total lumen output 1643 lm
 Correlated Colour Temperature 3115 K
 Colour coordinates CIE 1931 (x;y) = (0.429;0.400)
 Colour deviation from BBL Duv = -0.0003

TM30-18 Colour Fidelity Index R_f 87.0
 TM30-18 Colour Gamut Index R_g 98.5
 Colour Rendering Index (Ra) CRI 86.0
 Colour Rendering Index. (red component) $R_9 = 18.3$


Colour Quality Scale CQS = 84.8
 Television Lighting Consistency Index TLCI = 72

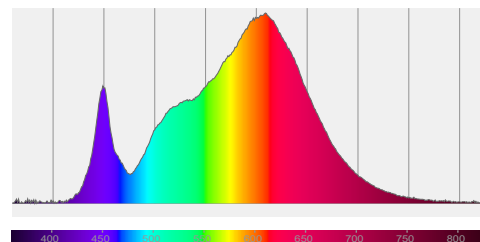

Relative spectral power distribution



TM30 details

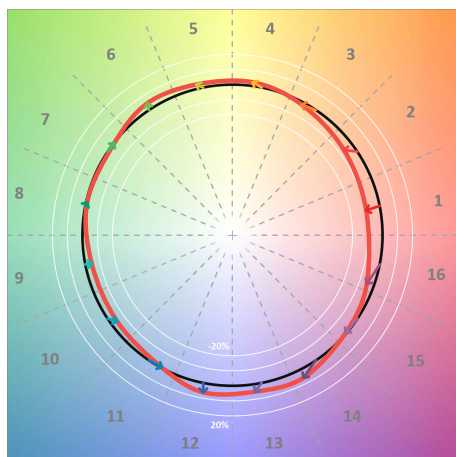


TM30 Colour vectors per hue bin




TM30 Colour distortion


Hue Bin	R_f	Shifts (%)	
		Chroma	Hue
C1	83	-10%	-1%
C2	84	-7%	6%
C3	81	-2%	10%
C4	89	2%	7%
C5	93	3%	4%
C6	92	4%	-2%
C7	88	-1%	-7%
C8	95	-1%	-2%
C9	92	-4%	1%
C10	88	-4%	5%
C11	85	-1%	10%
C12	88	6%	1%
C13	89	5%	-6%
C14	83	5%	-13%
C15	82	-1%	-12%
C16	81	-6%	-14%

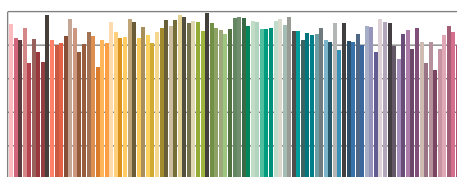

TM30-18 R_f -values per reference colour

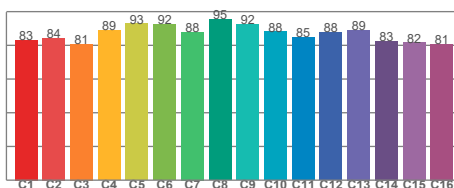


TM30-18 R_f -values per hue bin

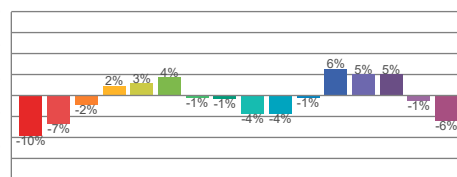


TM30 Chroma shift

Colour Quality details

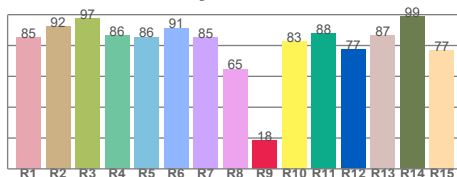

Colour Rendering Index

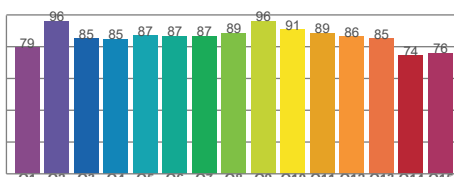

Colour Quality Scale