

136-344 6W specific configuration

Adj. downl | white | Ø180mm | 45° | 3000K | 6~15W | GST18i3

Introduction

Purpose of this Document

This document provides information for 136-344 6W. During measurement, the product is used in a different mode where output power, colour temperature and/or beam angle are changed from factory standard. These adjustments can be made without altering the product and are designed to be set by the installer. In most cases, the options are set through switches on the product.

Results


Total input power	6.2 W
Correlated Colour Temperature	3101 K
Total lumen output	680 lm
Efficiency	110 lm/W

Electrical measurement details

Input Power

RMS Input voltage feed. V_{RMS}	235 V
RMS Input current feed. I_{RMS}	0.032 A
Total input power	6.2 W
Frequency of input power	50 Hz
Power factor	0.84
Displacement power factor	0.88
Total harmonic distortion of the current	19.27%
Total harmonic distortion of the voltage	2.7%

Input Power Curve

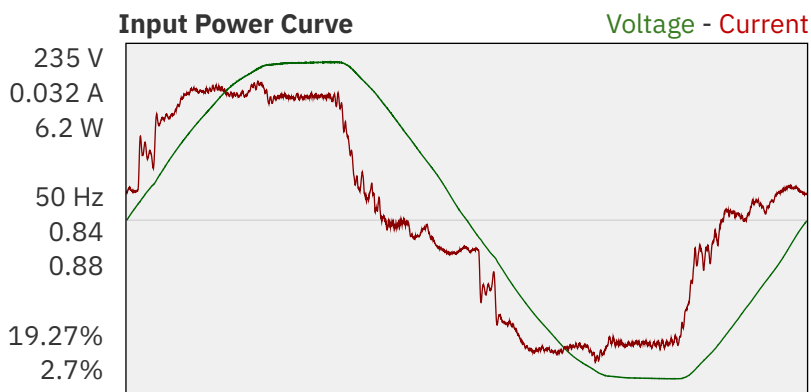

Efficiency

Radiated power efficiency: 33.8%




Lumen efficiency: 110 lm/W



Harmonics

3rd Harmonic	8.99%
5th Harmonic	14.53%
7th Harmonic	2.33%
9th Harmonic	5.59%
11th Harmonic	2.24%

Current Harmonics %

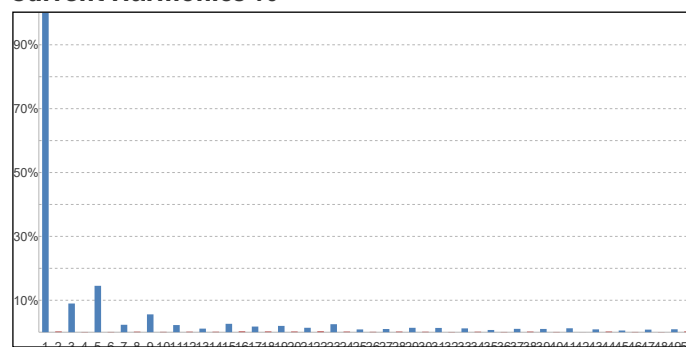


136-344 6W specific configuration

Colour measurement details


Total lumen output 680 lm
 Correlated Colour Temperature 3101 K
 Colour coordinates CIE 1931 (x;y) = (0.429;0.400)
 Colour deviation from BBL Duv = -0.0005

TM30-18 Colour Fidelity Index R_f 87.2
 TM30-18 Colour Gamut Index R_g 98.4
 Colour Rendering Index (Ra) CRI 86.2
 Colour Rendering Index. (red component) $R_9 = 19.5$


Colour Quality Scale CQS = 85.0
 Television Lighting Consistency Index TLCI = 73

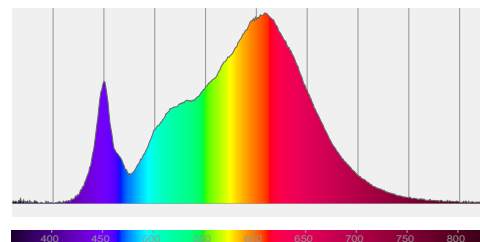

Relative spectral power distribution

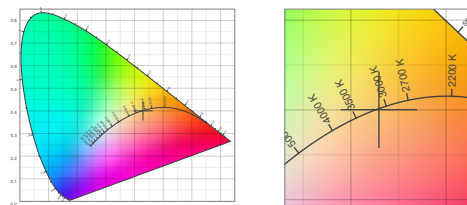

TM30 details

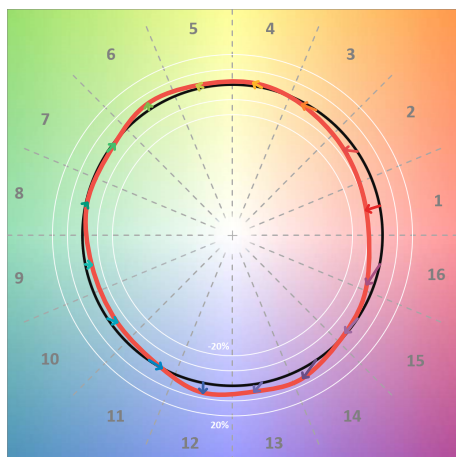


TM30 Colour vectors per hue bin




TM30 Colour distortion


Hue Bin	R_f	Shifts (%)	
		Chroma	Hue
C1	83	-9%	-1%
C2	85	-7%	6%
C3	81	-2%	10%
C4	90	2%	6%
C5	93	2%	4%
C6	93	4%	-2%
C7	89	-1%	-7%
C8	96	-1%	-2%
C9	92	-4%	1%
C10	88	-4%	5%
C11	85	0%	10%
C12	88	7%	1%
C13	89	5%	-6%
C14	82	5%	-14%
C15	82	-1%	-12%
C16	80	-6%	-15%

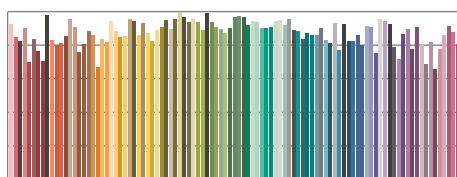

TM30-18 R_f -values per reference colour

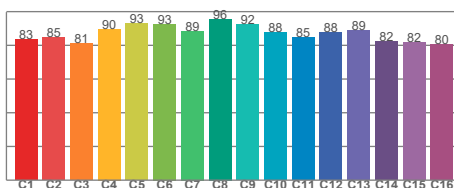


TM30-18 R_f -values per hue bin

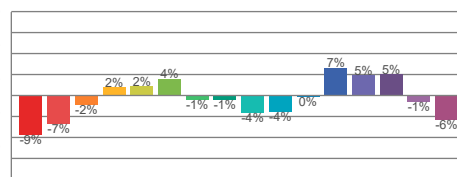


TM30 Chroma shift

Colour Quality details

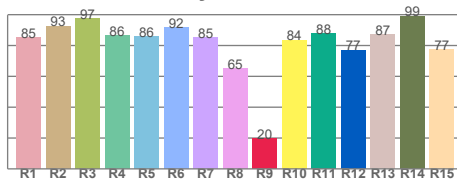

Colour Rendering Index

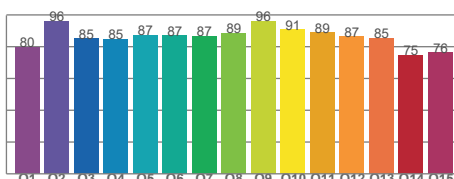

Colour Quality Scale